

Standard UL

Rated voltage
Rated current
Contact resistance
Insulation resistance
With standing voltage
Wire range

300V
10A
20mΩ
500V
AC: 22-
22-

Standard IEC



Rated voltage
Rated current
Wire range

320V
18A
1.5-
-40°
+25°
0.3N
4-5m
5.0m
2p,3p

Temp. Range
MAX Soldering

Torque
Strip Length

Pitch
Poles

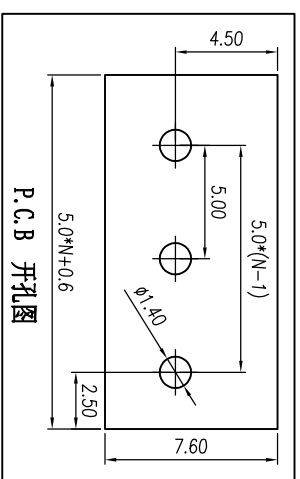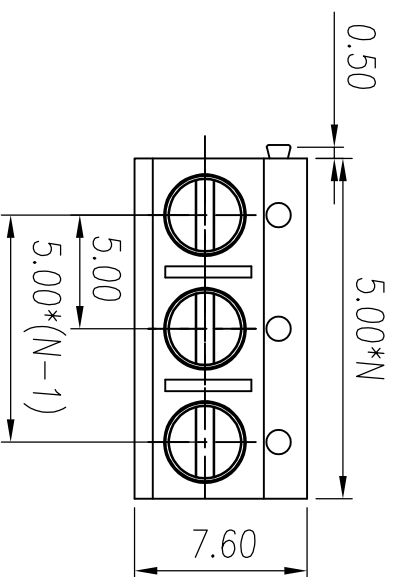

P.C.B. 开孔图

D	linear dimension										≡	—	□	//	⊥	
	variable range	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all 5 to 5	over 5 to 30	over 30 to 120						
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4				

1

2

3

4

5

产品名称 Product Name	SH131A-5.0	
图样比例 Drawings Scale	3:1	1
宁波新三和连接 SAMHE NINGBO NEW SAMHE ELECTRIC		