




# 宁波新三和连接电气有限公司

## NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书  
THE SPEC SHEET

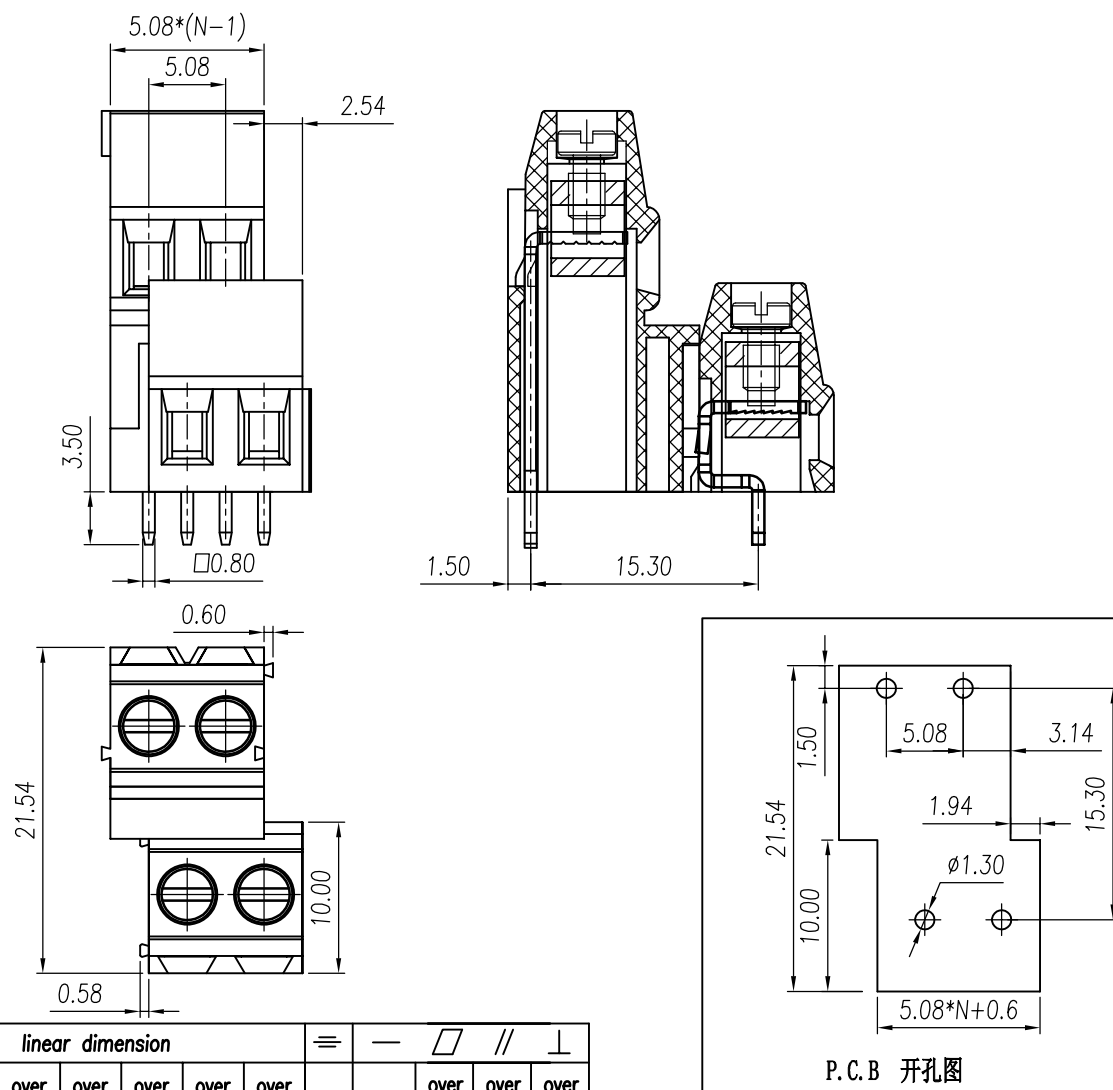

|                       |                    |  |
|-----------------------|--------------------|--|
| Standard              | UL                 |  |
| Rated voltage         | 300V               |  |
| Rated current         | 10A                |  |
| Contact resistance    | 20mΩ               |  |
| Insulation resistance | 500MΩ/DC500V       |  |
| Wrth standing voltage | AC 2000V/1 Min     |  |
| Wire range            | 22~14AWG           |  |
| Standard              | IEC                |  |
| Rated voltage         | 320V               |  |
| Rated current         | 20A                |  |
| Wire range            | 2.5mm <sup>2</sup> |  |
| Temp.Range            | -40°C~+105°C       |  |
| MAX Soldering         | +250°C for 5 Sec   |  |
| Torque                | 0.5Nm              |  |
| Steip Length          | 6-7mm              |  |
| Pitch                 | 5.08mm             |  |
| Poles                 | 2* 2p,2*3p         |  |

|                | linear dimension |               |               |               |                |                 |                 | ≡   | —     | □            | //             | ⊥           |
|----------------|------------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----|-------|--------------|----------------|-------------|
| variable range | to 10            | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | all | to 5  | over 5 to 30 | over 30 to 120 | over 120 to |
| tolerance      | ±0.15            | ±0.25         | ±0.35         | ±0.45         | ±0.60          | ±0.75           | ±0.90           | 0.5 | 0.025 | 0.06         | 0.12           | 0.4         |

|                       |              |                                             |                    |
|-----------------------|--------------|---------------------------------------------|--------------------|
| 产品名称<br>Product Name  | SH1422A-5.08 |                                             |                    |
| 图纸比例<br>Drawing Scale | 2:1          | A4                                          | 视图<br>Project View |
| 中国宁波慈溪                |              | 中国宁波慈溪                                      |                    |
| 宁波新三和连接电气有限公司         |              | NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD. |                    |
| TEL: +86(574)63226910 |              | FAX: +86(574)63226900                       |                    |