




宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

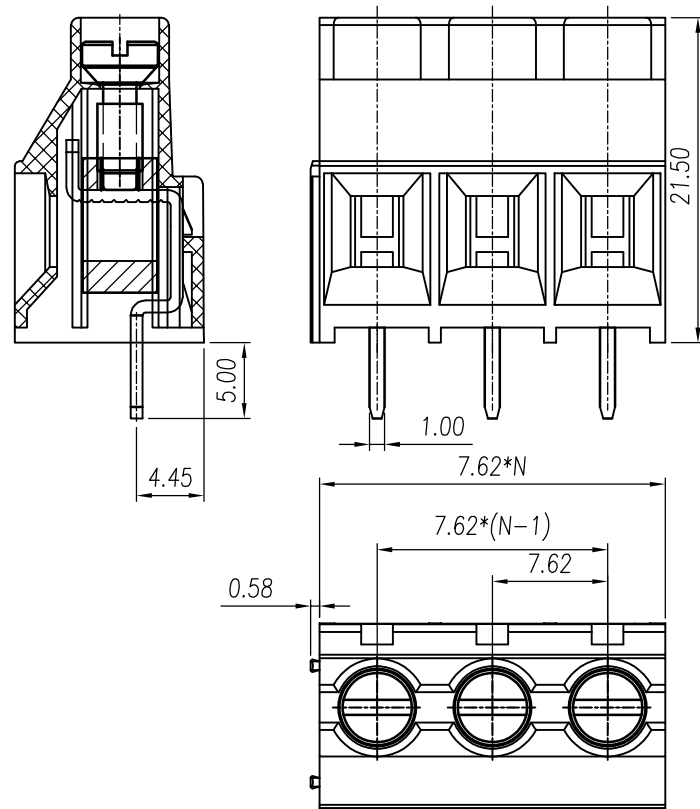


Standard UL

Rated voltage 300V
Rated current 15A
Contact resistance $20\text{m}\Omega$
Insulation resistance $500\text{M}\Omega/\text{DC}500\text{V}$
Wrth standing voltage AC 2000V/1 Min
Wire range 24~14AWG

Standard IEC

Rated voltage 630V
Rated current 20A
Wire range 2.5mm^2
Temp.Range $-40^\circ\text{C}\sim+105^\circ\text{C}$
MAX Soldering $+250^\circ\text{C}$ for 5 Sec

Torque 0.6Nm
Steip Length 7-8mm
Pitch 7.62mm
Poles 2p,3p

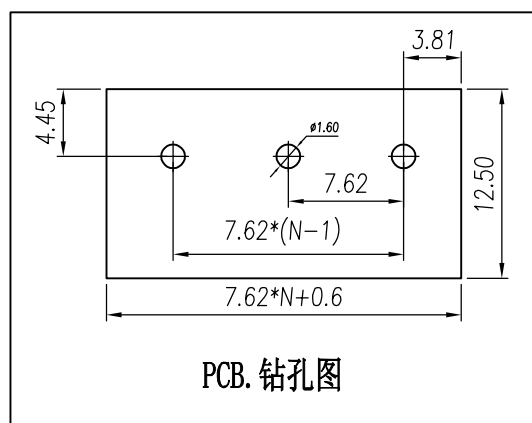

PCB. 钻孔图

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH146-7.62		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
中国宁波慈溪			中国宁波慈溪
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900