

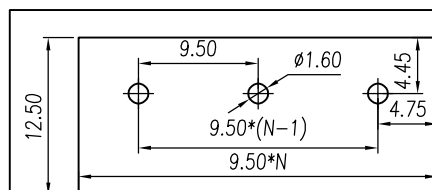
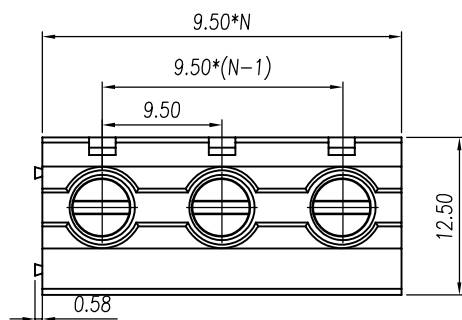


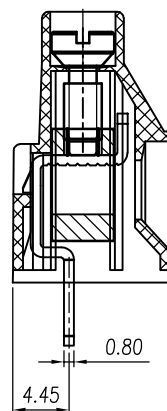

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

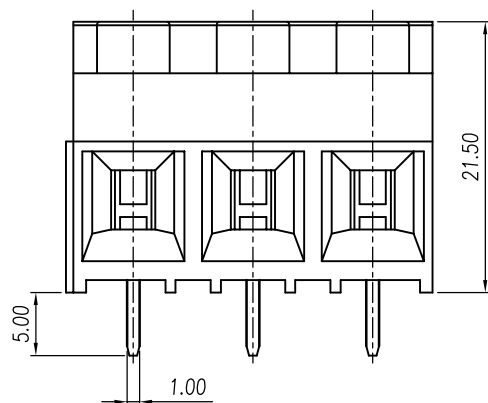

PCB. 钻孔图

Standard UL

Rated voltage 300V
Rated current 15A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Wrth standing voltage AC 2000V/1 Min
Wire range 24~14AWG

Standard IEC

Rated voltage 1000V
Rated current 20A
Wire range 1.5mm²

Temp.Range

-40°C~+105°C

MAX Soldering

+250°C for 5 Sec

Torque

0.6Nm

Steip Length

7-8mm

Pitch

9.5mm

Poles

2p,3p

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH146-9.5		
图纸比例 Drawing Scale	5:3	A4	视图 Project View
中国宁波慈溪		中国宁波慈溪	
宁波新三和连接电气有限公司		NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.	
TEL: +86(574)63226910		FAX: +86(574)63226900	