






# 宁波新三和连接电气有限公司

## NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书  
THE SPEC SHEET

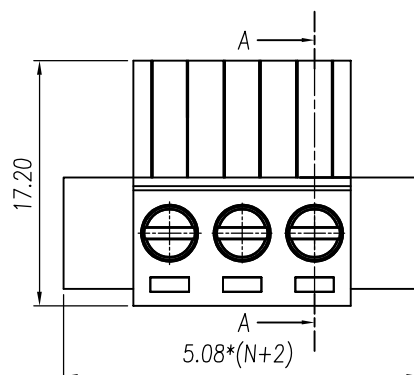

SECTION:A-A

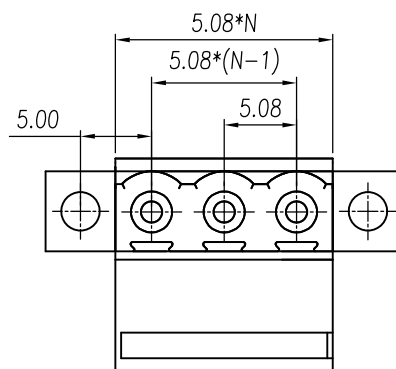

|                       |                    |
|-----------------------|--------------------|
| Standard              | UL                 |
| Rated voltage         | 300V               |
| Rated current         | 8A                 |
| Contact resistance    | 20mΩ               |
| Insulation resistance | 500MΩ/DC500V       |
| Wrth standing voltage | AC 2000V/1 Min     |
| Wire range            | 24~14AWG           |
| Standard              | IEC                |
| Rated voltage         | 320V               |
| Rated current         | 15A                |
| Wire range            | 2.5mm <sup>2</sup> |
| Temp.Range            | -40°C~+105°C       |
| MAX Soldering         | +250°C for 5 Sec   |
| Torque                | 0.5Nm              |
| Steip Length          | 7-8mm              |
| Pitch                 | 5.08mm             |
| Poles                 | 2-24p              |

|                | linear dimension |               |               |               |                |                 |                 | ≡   | —     | □            | //             | ⊥           |
|----------------|------------------|---------------|---------------|---------------|----------------|-----------------|-----------------|-----|-------|--------------|----------------|-------------|
| variable range | to 10            | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | all | to 5  | over 5 to 30 | over 30 to 120 | over 120 to |
| tolerance      | ±0.15            | ±0.25         | ±0.35         | ±0.45         | ±0.60          | ±0.75           | ±0.90           | 0.5 | 0.025 | 0.06         | 0.12           | 0.4         |

|                                                              |             |                                              |                    |
|--------------------------------------------------------------|-------------|----------------------------------------------|--------------------|
| 产品名称<br>Product Name                                         | SH230M-5.08 |                                              |                    |
| 图纸比例<br>Drawing Scale                                        | 2:1         | A4                                           | 视图<br>Project View |
|                                                              |             | 中国宁波慈溪                                       |                    |
| 宁波新三和连接电气有限公司<br>NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD. |             | TEL:+86(574)63226910<br>FAX:+86(574)63226900 |                    |