


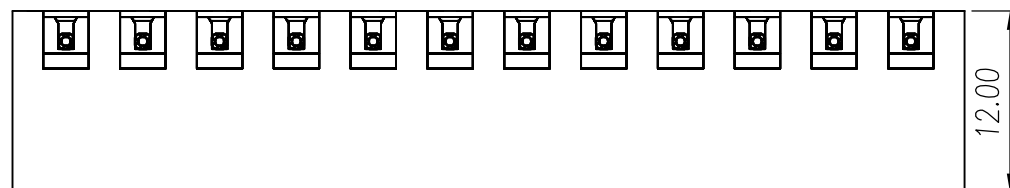


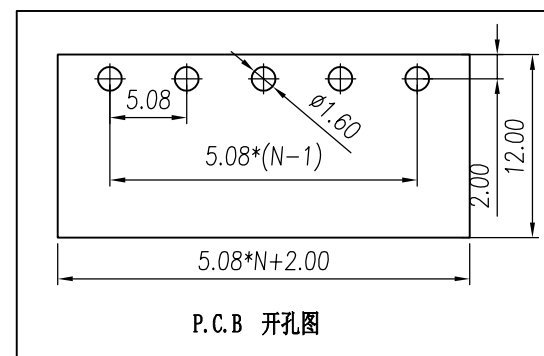

宁波新三和连接电气有限公司  
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

# 产品规格书

## THE SPEC SHEET

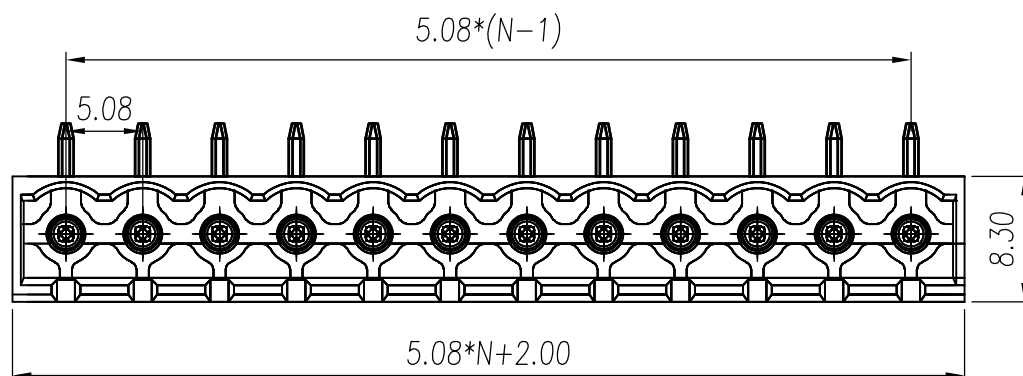

Standard UL

|                       |                |
|-----------------------|----------------|
| Rated voltage         | 300V           |
| Rated current         | 12A            |
| Contact resistance    | 20mΩ           |
| Insulation resistance | 500MΩ/DC500V   |
| Wrth standing voltage | AC 2000V/1 Min |

### Standard

|               |      |
|---------------|------|
| Rated voltage | 320V |
| Rated current | 20A  |

|               |                  |
|---------------|------------------|
| Temp.Range    | -40°C~+105°C     |
| MAX Soldering | +250°C for 5 Sec |
| Pitch         | 5.08mm           |
| Poles         | 2-24p            |

|                | linear dimension |               |               |               |                |                 |                 | $\equiv$ | $-$   | $\square$    | $//$           | $\perp$     |
|----------------|------------------|---------------|---------------|---------------|----------------|-----------------|-----------------|----------|-------|--------------|----------------|-------------|
| variable range | to 10            | over 18 to 30 | over 30 to 50 | over 50 to 80 | over 80 to 120 | over 120 to 160 | over 160 to 200 | all      | to 5  | over 5 to 30 | over 30 to 120 | over 120 to |
| tolerance      | $\pm 0.15$       | $\pm 0.25$    | $\pm 0.35$    | $\pm 0.45$    | $\pm 0.60$     | $\pm 0.75$      | $\pm 0.90$      | 0.5      | 0.025 | 0.06         | 0.12           | 0.4         |

|                                                                                       |     |                                                                                       |                    |
|---------------------------------------------------------------------------------------|-----|---------------------------------------------------------------------------------------|--------------------|
| 产品名称<br>Product Name                                                                  |     | SH230SRA-5.08                                                                         |                    |
| 图纸比例<br>Drawing Scale                                                                 | 2:1 | A4                                                                                    | 视图<br>Project View |
|                                                                                       |     |  |                    |
|  |     | 中国宁波慈溪<br>TEL: +86(574)63226910<br>FAX: +86(574)63226900                              |                    |
| 宁波新三和连接电气有限公司<br>NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.                          |     |                                                                                       |                    |