



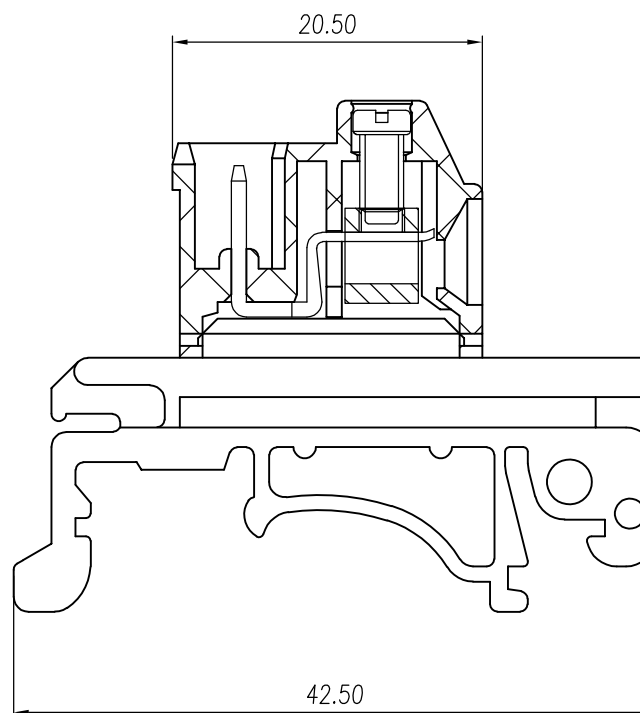

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

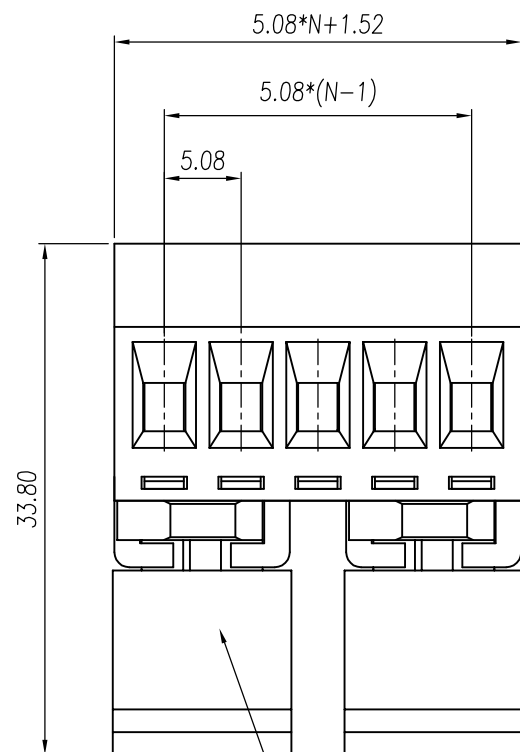

Standard	UL	
Rated voltage	300V	
Rated current	10A	
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wrth standing voltage	AC 2000V/1 Min	
Wire range	24~14AWG	
Standard	IEC	
Rated voltage	320V	
Rated current	15A	
Wire range	2.5mm ²	
Temp.Range	-40°C~+105°C	
MAX Soldering	+250°C for 5 Sec	
Torque	0.5Nm	
Steip Length	7-8mm	
Pitch	5.08mm	
Poles	2-24p	

2-4P只有一个, 5PJ及5P以上2个

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH237-5.08		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
中国宁波慈溪			中国宁波慈溪
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900