




宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

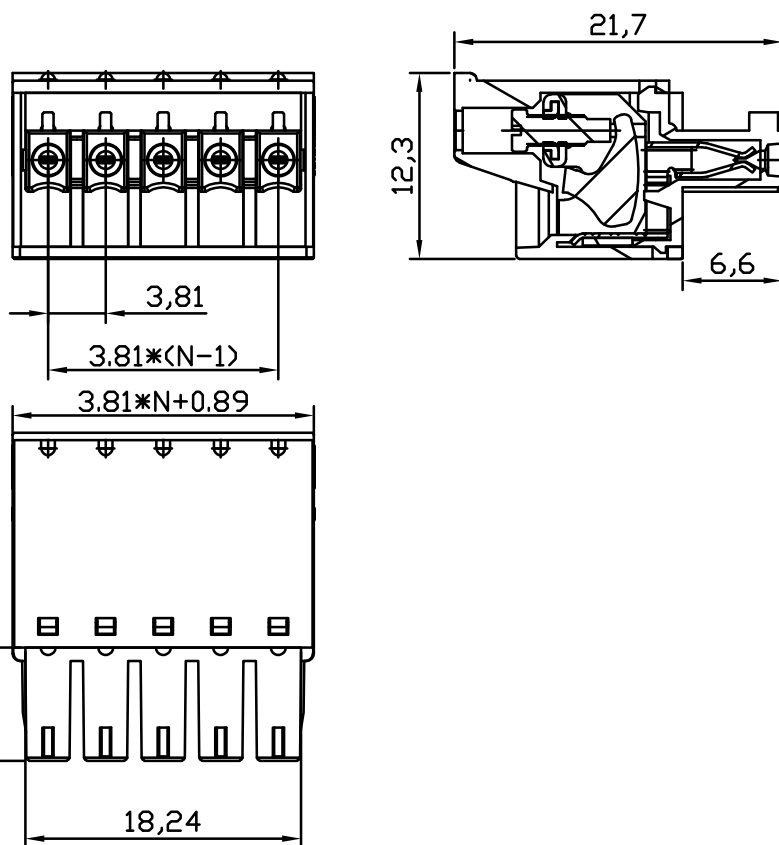

Standard	UL
Rated voltage	300V
Rated current	8A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wrth standing voltage	AC 2000V/1 Min
Wire range	26~16AWG
Standard	IEC
Rated voltage	250V
Rated current	10A
Wire range	1.5mm ²
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Torque	0.25Nm
Steip Length	5-6mm
Pitch	3.81mm
Poles	2-24p

linear dimension

variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to 200	
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4	

产品名称 Product Name	SH241-3.81		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
SANHE 宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.		中国宁波 TEL: +86(574)63226910 FAX: +86(574)63226900	