



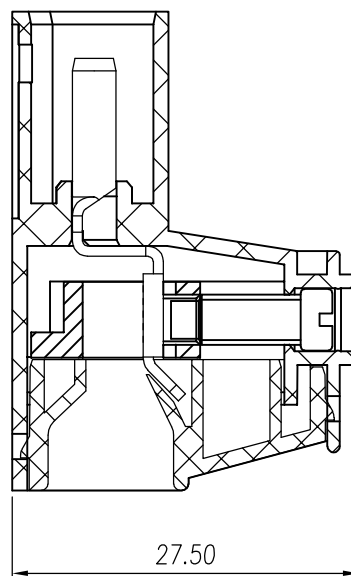

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

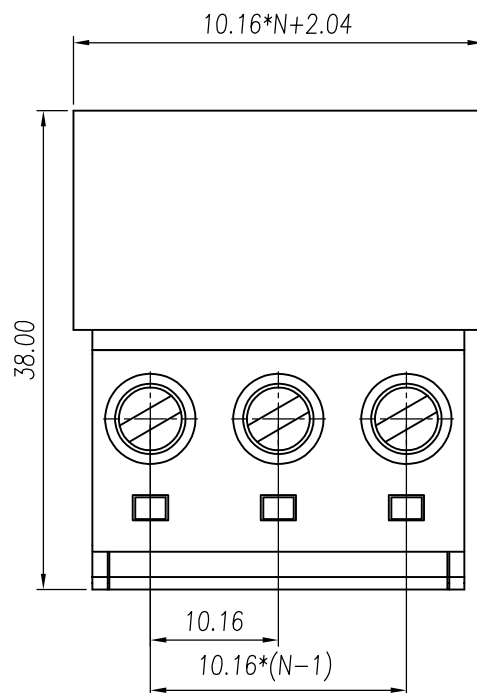

Standard	UL	
Rated voltage	600V	
Rated current	50A	
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Wrth standing voltage	AC 2000V/1 Min	
Wire range	20~6AWG	
Standard	IEC	
Rated voltage	1000V	
Rated current	76A	
Wire range	6.0mm ²	
Temp.Range	-40°C~+105°C	
MAX Soldering	+250°C for 5 Sec	
Torque	1.2Nm	
Steip Length	8-9mm	
Pitch	10.16mm	
Poles	2-12p	

	linear dimension							≡	—	▧	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH244A-10.16				
图纸比例 Drawing Scale	5:3	A4	视图 Project View		
中国宁波慈溪 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.					中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900