

1

2

3

4

5

6





宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

2P时只有该卡扣

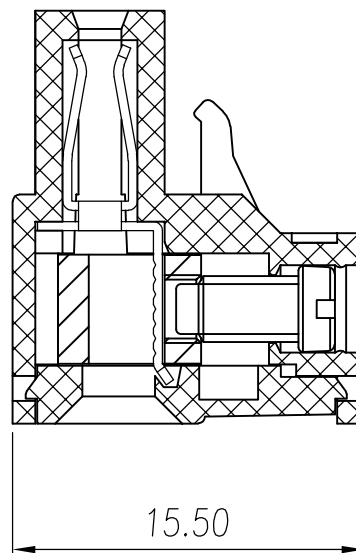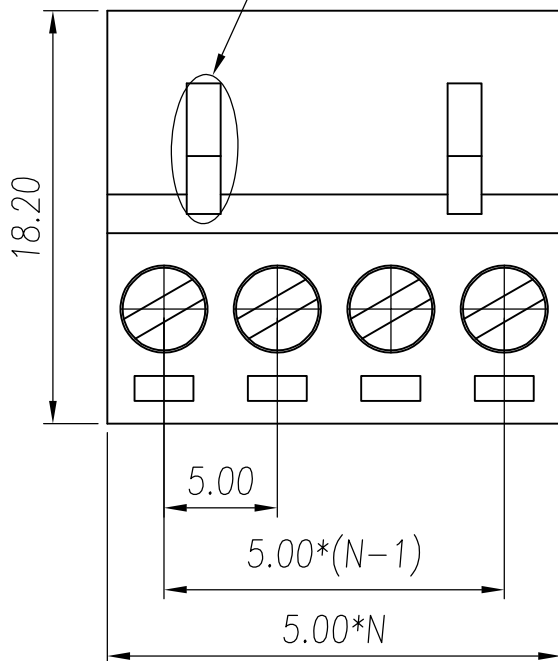

Standard UL

Rated voltage 300V
Rated current 8A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Wrth standing voltage AC 2000V/1 Min
Wire range 24~14AWG

Standard IEC

Rated voltage 250V
Rated current 10A
Wire range 2.5mm²
Temp.Range -40°C~+105°C
MAX Soldering +250°C for 5 Sec

Torque 0.4Nm
Steip Length 6-7mm
Pitch 5.0mm
Poles 2-8p

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH245-5.0		
图纸比例 Drawing Scale	3:1	A4	视图 Project View
		中国宁波慈溪	
宁波新三和连接电气有限公司		NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.	
		TEL: +86(574)63226910 FAX: +86(574)63226900	