

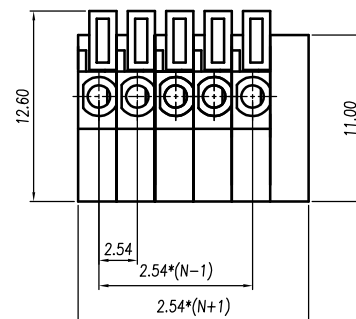




宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

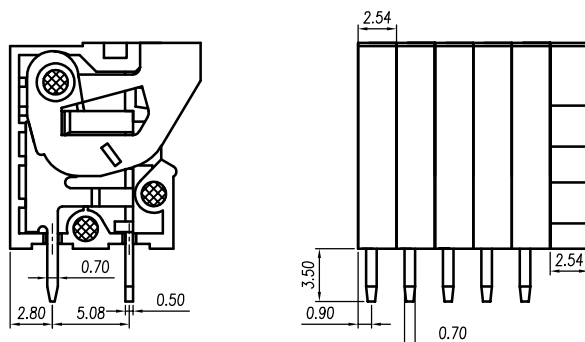

Standard UL

Rated voltage 150V
Rated current 5A
Contact resistance $20m\Omega$
Insulation resistance $500M\Omega/DC500V$
Wrth standing voltage AC 2000V/1 Min
Wire range 24~18AWG

Standard IEC

Rated voltage 250V
Rated current 10A
Wire range $1.0mm^2$
Temp.Range $-40^{\circ}C \sim +105^{\circ}C$
MAX Soldering $+250^{\circ}C$ for 5 Sec
Steip Length 7-8mm
Pitch 2.54mm
Poles xxP

linear dimension

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	± 0.15	± 0.25	± 0.35	± 0.45	± 0.60	± 0.75	± 0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH300V-2.54		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
中国宁波慈溪			中国宁波慈溪
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900