




宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

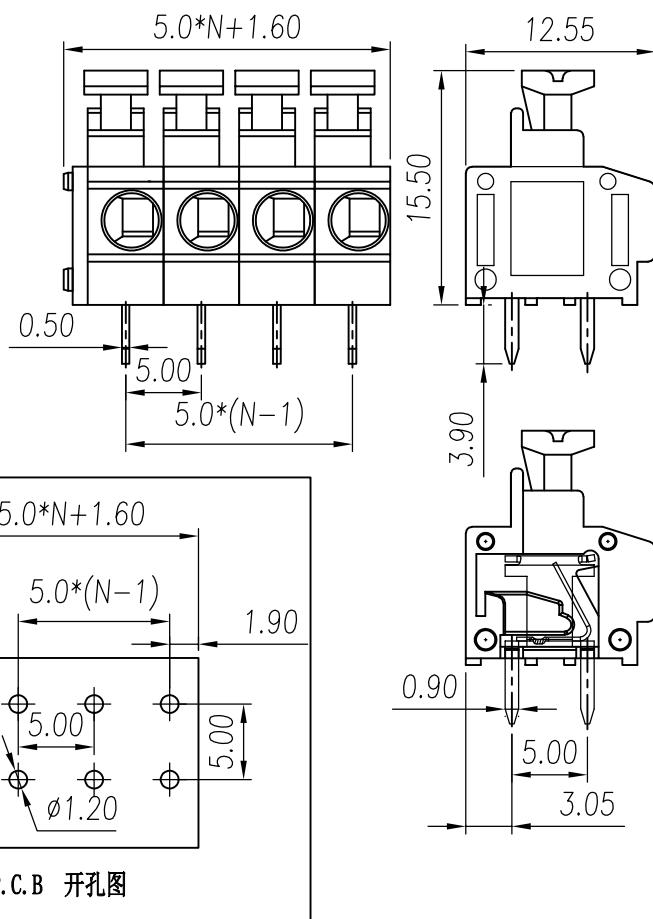

Standard UL

Rated voltage	300V
Rated current	5A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wrth standing voltage	AC 2000V/1 Min
Wire range	24~16AWG

Standard IEC

Rated voltage	320V
Rated current	10A
Wire range	1.5mm ²
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Steip Length	9-10mm
Pitch	5.0mm
Poles	xxP

variable range	linear dimension							all	to 5	over 5 to 30	over 30 to 120	over 120 to
	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200					
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH305-5.0		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
中国宁波慈溪 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900