




宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

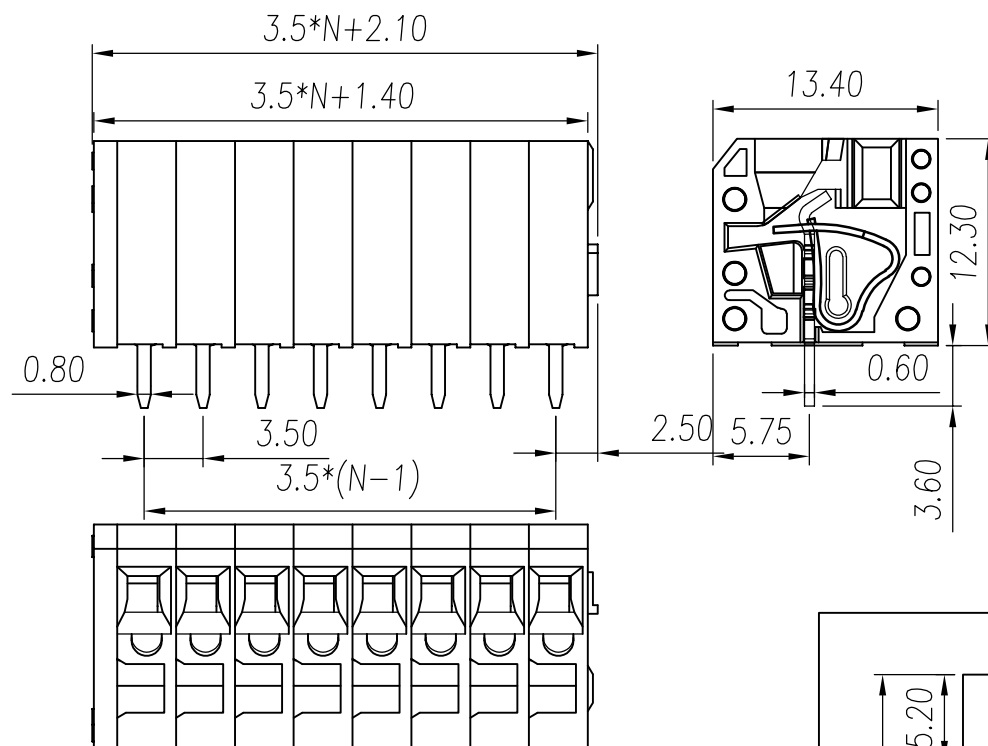


Standard UL

Rated voltage	300V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wrth standing voltage	AC 2000V/1 Min
Wire range	24~14AWG

Standard	IEC
Rated voltage	
Rated current	
Wire range	

Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Steip Length	9-10mm
Pitch	3.5mm
Poles	XXP

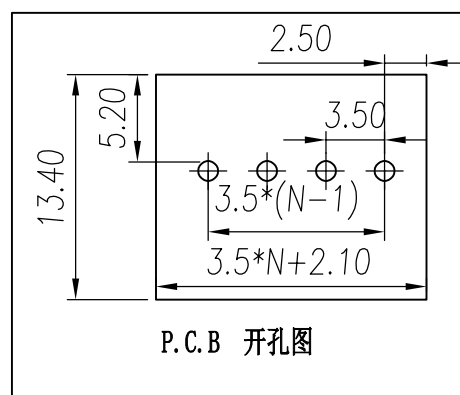

	linear dimension							$\equiv$	$-$	$\square$	$//$	$\perp$
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	± 0.15	± 0.25	± 0.35	± 0.45	± 0.60	± 0.75	± 0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name		SH329-5.0	
图纸比例 Drawing Scale	2:1	A4	视图 Project View
			



宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

中国宁波慈溪

TEL+86(574)63226910

FAX+86(574)63226900