

1

2

3

4

5


6



宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

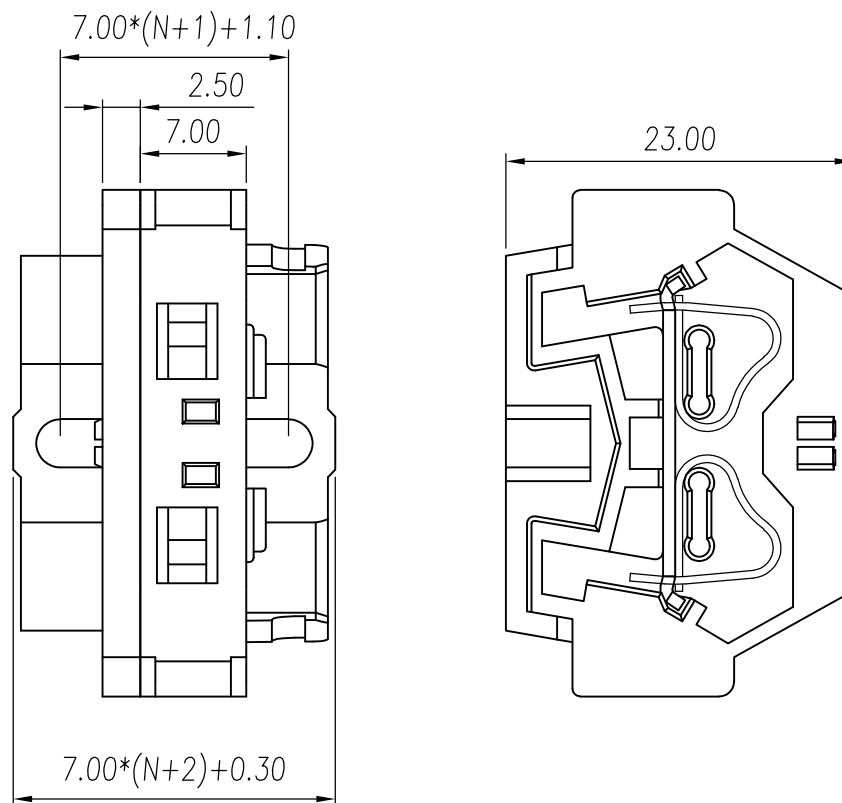

Standard UL

Rated voltage 300V
Rated current 20A
Contact resistance $20m\Omega$
Insulation resistance $500M\Omega/DC500V$
Wrth standing voltage AC 2000V/1 Min
Wire range 28~12AWG

Standard IEC

Rated voltage 630V
Rated current 24A
Wire range $4.0mm^2$

Temp.Range

$-40^{\circ}C \sim +105^{\circ}C$

MAX Soldering

$+250^{\circ}C$ for 5 Sec

Steip Length

9-10mm

Pitch

7.0mm

Poles

More than 1P

linear dimension

$\equiv$ $-$ $\square$ $//$ $\perp$

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH331-7.0		
图纸比例 Drawing Scale	2:1	A4	视图 Project View
		中国宁波慈溪	
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.		TEL: +86(574)63226910 FAX: +86(574)63226900	