

1

2

3





4

5


6

宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

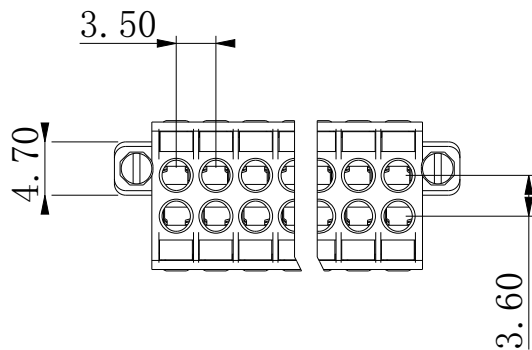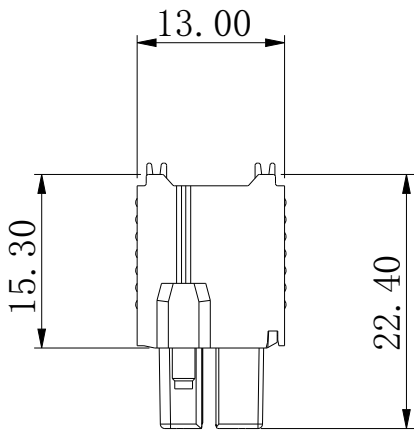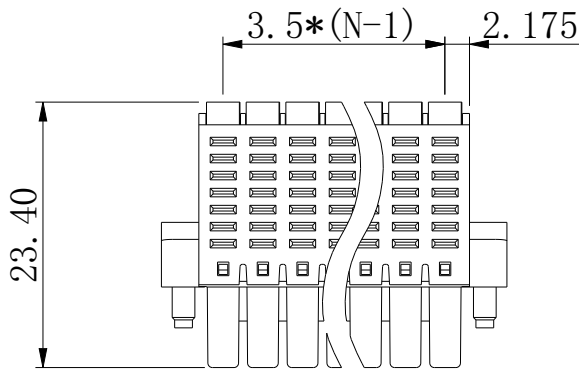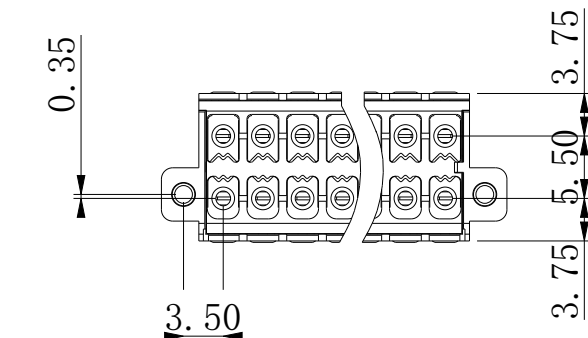


UL 标准 / UL Standard:	B	C	D
额定电压 / Rted Voltage	160V	/	/
额定电流 / Rated Current	8A	/	/
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压 / Rted Voltage	/	160V	/
额定电流 / Rated Current	/	8A	/
线径范围 / Wire Range	24-16AWG / 0.2-1.5mm ²		
额定脉冲电压 / Rate Impulse Voltage	2.5KV		
使用温度范围 / Operating Temperature	-40 °C ~ +105 °C		
剥线长度 / Stripping Length	10mm		
间距 / Spacing	3.5mm		
线数范围 / Line Number Range	2-24P		

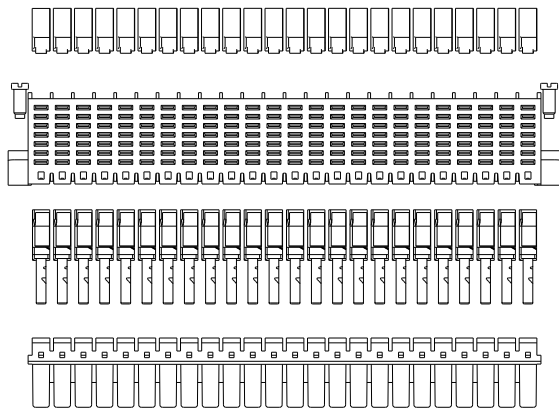

5	SH255弹片夹子	255W300350	组件	
4	136螺丝	LS02-JZ-M2	不锈钢	
3	SH255按钮	255B300350	POM	
2	SH255-3.5盖板	255B200350	PA66	
1	SH255M-3.5主体	255MB100350	PA66	
ITEM	Part Name	Part Number	Material	Notes

端子成品公差带	线性尺寸(参考公差标准GB/T 14486-2008)											圆角	倒角	∠角度公差				≡	—	□	//	⊥	
尺寸范围	0 ≈ 6	> 6 ≈ 10	> 10 ≈ 18	> 18 ≈ 30	> 30 ≈ 50	> 50 ≈ 80	> 80 ≈ 120	> 120 ≈ 160	> 160 ≈ 200	> 200 ≈ 250	> 250	所有	< 6	> 6	0 ≈ 10	> 10 ≈ 50	> 50 ≈ 120	> 120	所有	> 5	> 5 ≈ 30	> 30 ≈ 120	> 120
公差值	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	±0.2	±0.5	±1	1°	30′	20′	10′	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name		SH255M-3.5			
图纸比例 Drawing Scale			A4	视图 Project View	 (mm)
 宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.		中国宁波慈溪 TEL:+86(574)63226910 FAX:+86(574)63226900			