
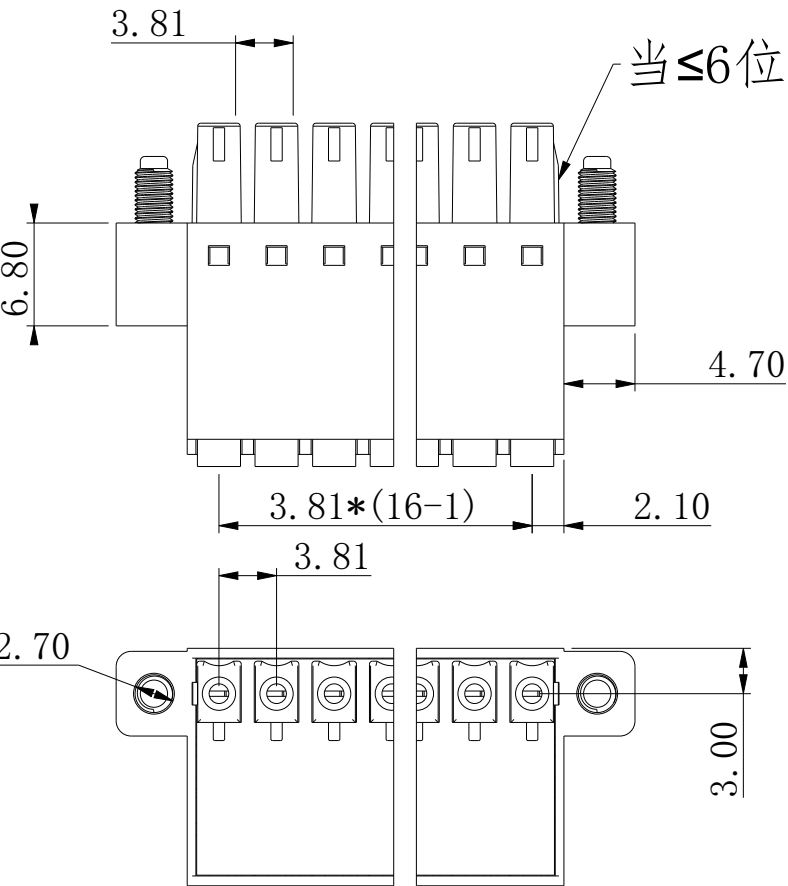
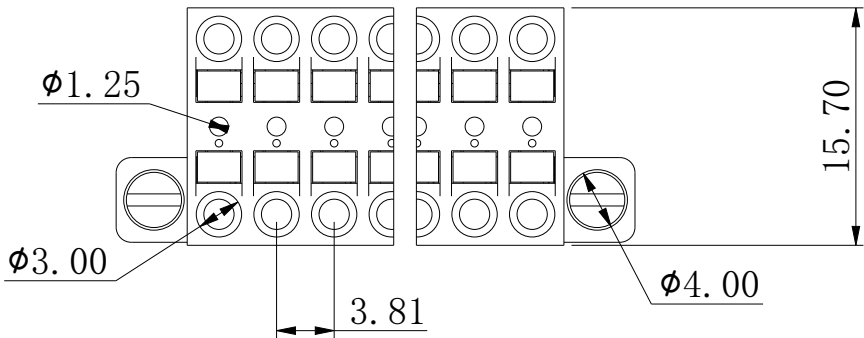


1
 2
 3
 4
 5
 6



257W300381
 LS04M2. 6-Zn

宁波新三和连接电气有限公司
 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
 THE SPEC SHEET

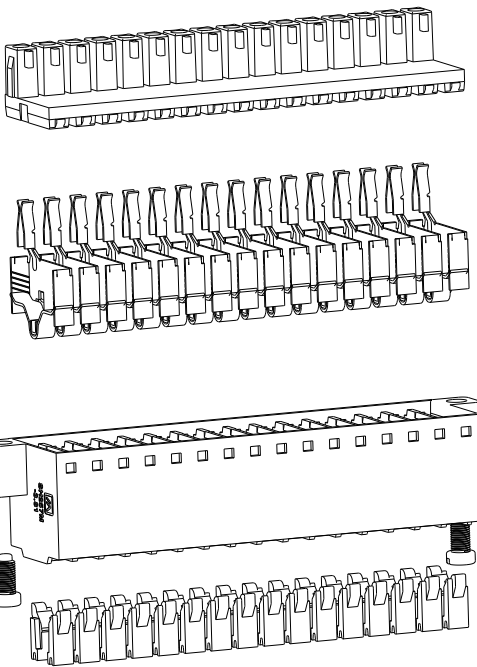

当≤6位时保留左右两条筋

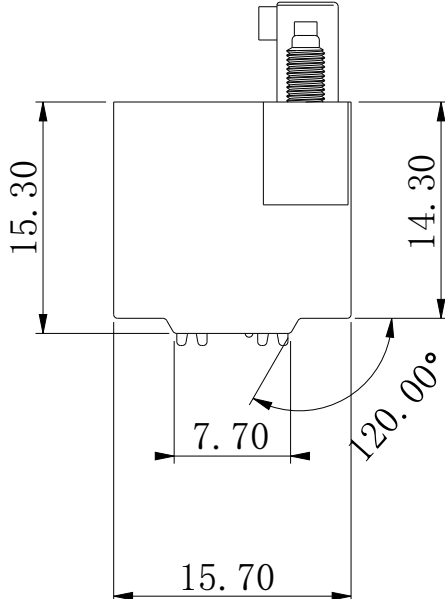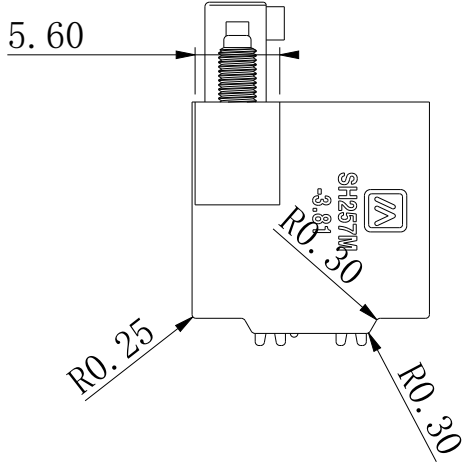

UL 标准 / UL Standard:		B	C	D
额定电压 / Rted Voltage		300V	/	/
额定电流 / Rated Current		8A	/	/
IEC 标准 / IEC Standard:				
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree		III/3	III/2	II/2
额定电压 / Rted Voltage		/	160V	/
额定电流 / Rated Current		/	8A	/
线径范围 / Wire Range		24-16AWG / 0.2-1.5mm ²		
额定脉冲电压 / Rate Impulse Voltage		2.5KV		
使用温度范围 / Operating Temperature		-40 °C ~ +105 °C		
剥线长度 / Stripping Length		10mm		
间距 / Spacing		3.5mm		
线数范围 / Line Number Range		2-16P		

5	136螺丝	SH136	不锈钢	
4	SH257弹片夹子	257W300381	组件	
3	SH257按钮	257B300381	POM	
2	SH257M-3.81盖板	257B200381	PA66	
1	SH257M-3.81主体	257MB100381	PA66	
ITEM	Part Name	Part Number	Material	Notes


端子成品公差带	线性尺寸(参考公差标准GB/T 14486-2008)											圆角	倒角	∠角度公差				≡—□//⊥					
尺寸范围	0 ≈ 6	> 6 ≈ 10	> 10 ≈ 18	> 18 ≈ 30	> 30 ≈ 50	> 50 ≈ 80	> 80 ≈ 120	> 120 ≈ 160	> 160 ≈ 200	> 200 ≈ 250	> 250	所有	< 6	> 6	0 ≈ 10	> 10 ≈ 50	> 50 ≈ 120	> 120	所有	> 5	> 5 ≈ 30	> 30 ≈ 120	> 120
公差值	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	±0.2	±0.5	±1	1°	30"	20"	10"	0.5	0.025	0.06	0.12	0.4

产品名称
 Product Name

SH257M-3.81

图纸比例
 Drawing Scale

A4
 视图
 Project View

 (mm)


 宁波新三和连接电气有限公司
 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

中国宁波慈溪
 TEL: +86(574)63226910
 FAX: +86(574)63226900