




宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

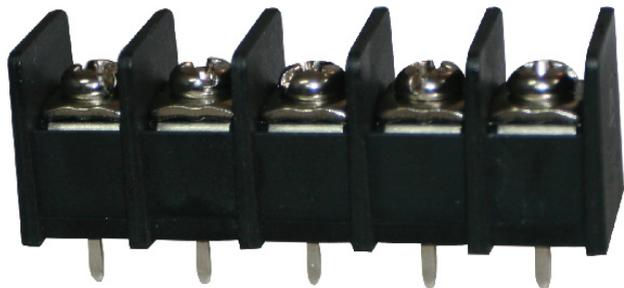

认证
电气性能
参考标准
额定电压
额定电流
使用线径
耐电压


VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm ²
AC2000V/Min	

机械性能
温度范围
剥线长度
扭矩
尺寸
间距
极数

-40℃~+105℃
6-7mm
4.0kgf.cm

材质及电镀
塑件
方块
夹子
螺丝

Pa66 UL94V-0
黄铜 镀镍
磷铜 镀镍
M3 铁 镀镍

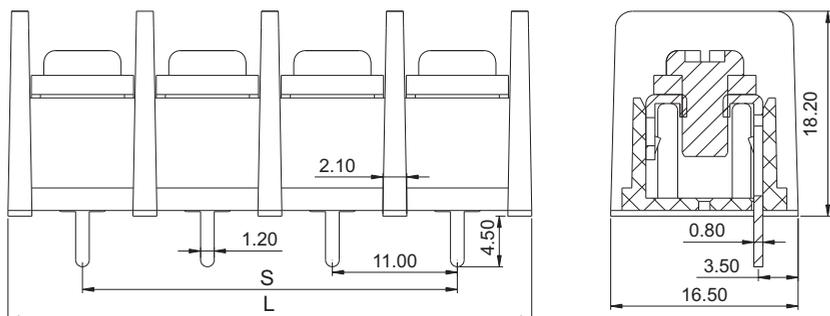


$S=11.0 \times (N-1)$

$L=11.0 \times N + 2.1$

极数	2	3	4	5	6	7	8	9	10
L (mm)	24.10	35.10	46.10	57.10	68.10	79.10	90.10	101.10	112.10
S (mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00
极数	11	12	13	14	15	16			
L (mm)	123.10	134.10	145.10	156.10	167.10	178.10			
S (mm)	110.00	121.00	132.00	143.00	154.00	165.00			

订购方式:

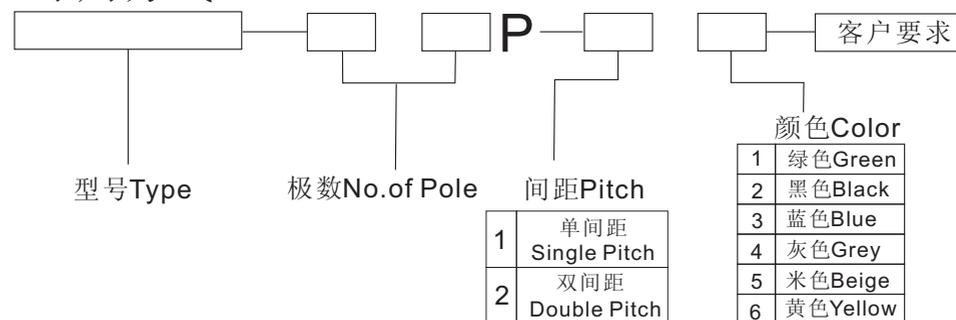

	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
	NAME SH901A-11.0