



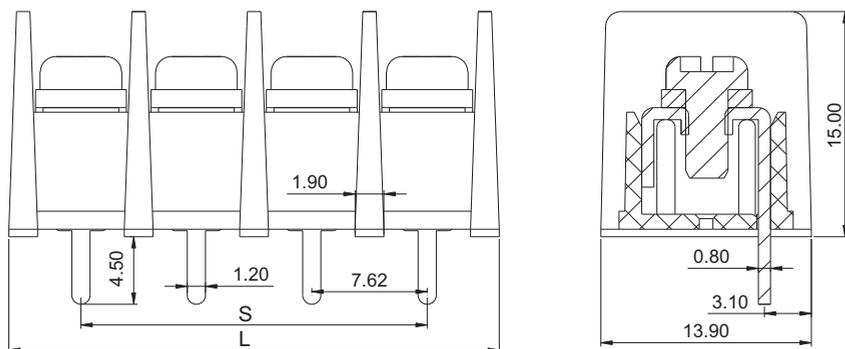

宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

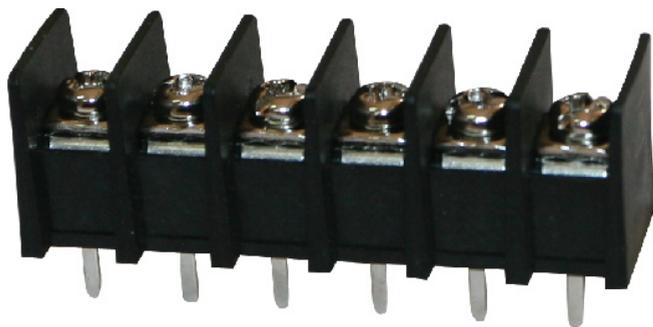

$$S=7.62 \times (N-1)$$

$$L=7.62 \times N + 1.9$$

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	17.14	24.76	32.38	40.00	47.62	55.24	62.86	70.48	78.10	85.72	93.34	100.96
S (mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.24	60.96	68.58	76.20	83.82	91.44
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	108.58	116.20	123.82	131.44	139.06	146.68	154.30	161.92	169.54	177.18	184.78	
S (mm)	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

认证

电气性能

参考标准

额定电压

额定电流

使用线径

耐电压

VDE

250V

8A

24-14AWG

AC2000V/Min

IEC

300V

10A

2.5mm²

机械性能

温度范围

剥线长度

扭矩

尺寸

间距

极数

-40℃~+105℃

6-7mm

4.0kgf.cm

材质及电镀

塑件

方块

夹子

螺丝


Pa66 UL94V-0

黄铜 镀镍

磷铜 镀镍

M3 铁 镀镍

订购方式:

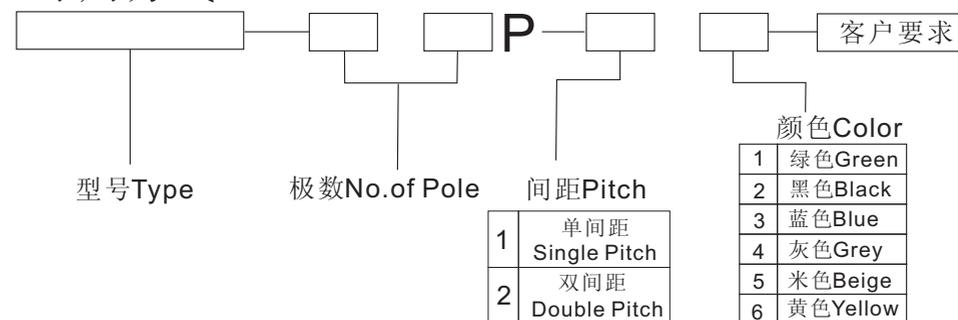

型号Type

极数No. of Pole

间距Pitch

客户要求

颜色Color

1	绿色Green
2	黑色Black
3	蓝色Blue
4	灰色Grey
5	米色Beige
6	黄色Yellow

1	单间距 Single Pitch
2	双间距 Double Pitch

MM
(INCH)

THIRD ANGLE PROJECTION

宁波新三和连接电气有限公司
Ning Bo New Sanhe Electrical Connection Co.,Ltd

NAME

SH901A-7.62