



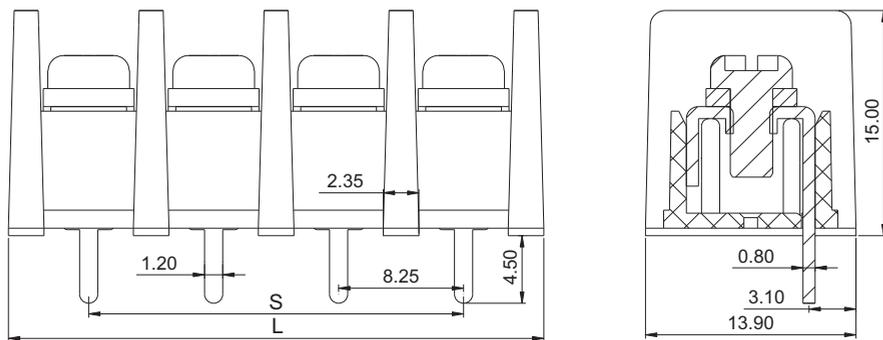

宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

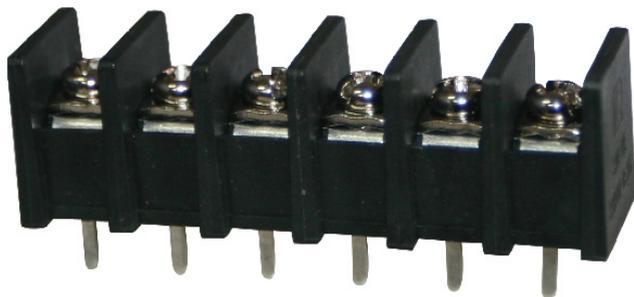

$$S=8.25 \times (N-1)$$

$$L=8.25 \times N + 2.35$$

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	18.85	27.10	35.35	43.60	51.85	60.10	68.35	76.60	84.85	93.10	101.35	109.60
S (mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	117.85	126.10	134.35	142.60	150.85	159.10	167.35	175.60	183.85	192.10	200.35	
S (mm)	107.25	115.50	123.75	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	

认证
电气性能
参考标准
额定电压
额定电流
使用线径
耐电压

VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm ²
AC2000V/Min	


机械性能
温度范围
剥线长度
扭矩
尺寸
间距
极数

-40℃~+105℃
6-7mm
4.0kgf.cm

材质及电镀
塑件
方块
夹子
螺丝

Pa66 UL94V-0
黄铜 镀镍
磷铜 镀镍
M3 铁 镀镍

订购方式:

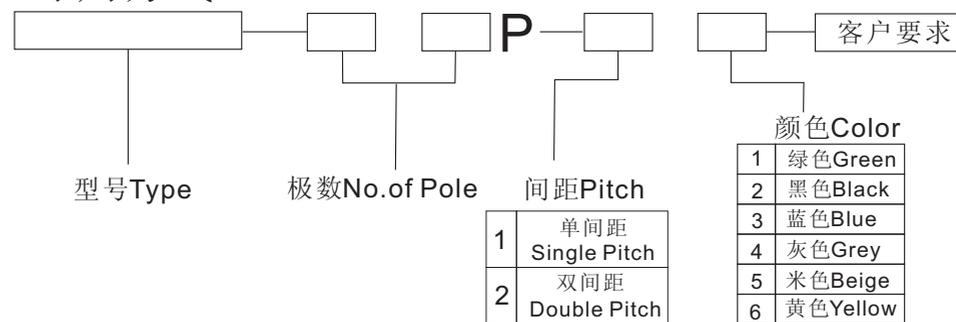

MM ← (INCH) →	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
THIRD ANGLE PROJECTION	NAME SH901A-8.25