



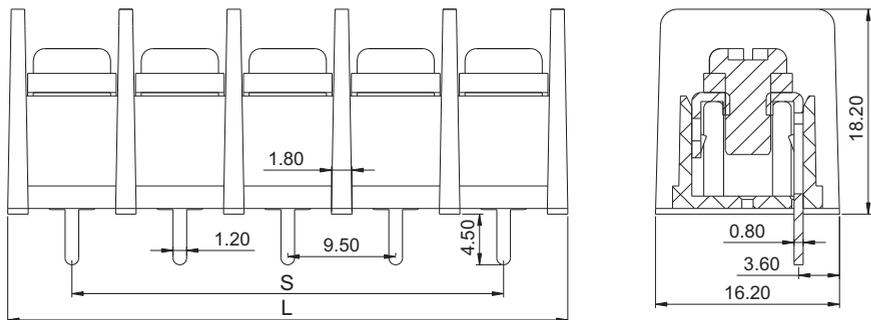

宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

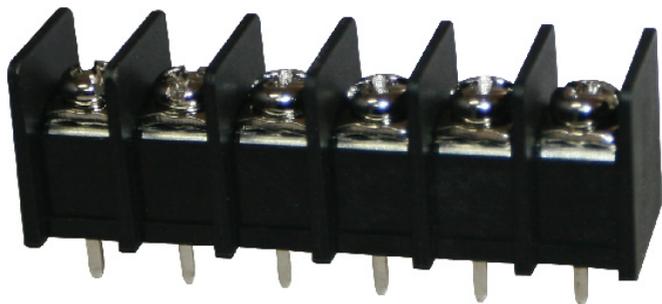


$$S=9.5 \times (N-1)$$

$$L=9.5 \times N + 1.8$$

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	20.80	30.30	39.80	49.30	58.80	68.30	77.80	87.30	96.80	106.30	115.80	125.30
S (mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	134.80	144.30	153.80	163.30	172.80	182.30	191.80	201.30	210.80	220.30	229.80	
S (mm)	123.50	133.00	142.50	152.00	161.50	171.00	180.50	190.00	199.50	209.00	218.50	

认证		
电气性能		
参考标准	VDE	IEC
额定电压	250V	300V
额定电流	8A	10A
使用线径	24-14AWG	2.5mm ²
耐电压	AC2000V/Min	
机械性能		
温度范围	-40℃~+105℃	
剥线长度	6-7mm	
扭矩	4.0kgf.cm	
尺寸		
间距		
极数		
材质及电镀		
塑件	Pa66 UL94V-0	
方块	黄铜 镀镍	
夹子	磷铜 镀镍	
螺丝	M3 铁 镀镍	

订购方式:

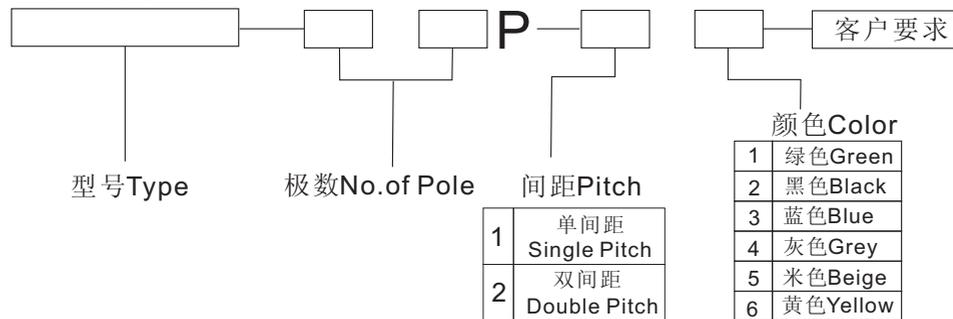

MM ← (INCH) →	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
THIRD ANGLE PROJECTION	NAME SH901A-9.5