



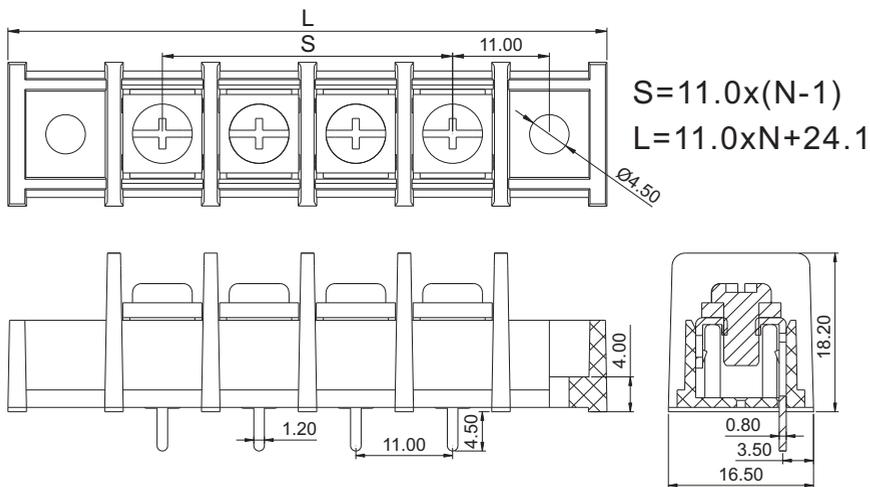

# 宁波新三和连接电气有限公司

## Ning Bo New Sanhe Electrical Connection Co.,Ltd

### 产品规格书

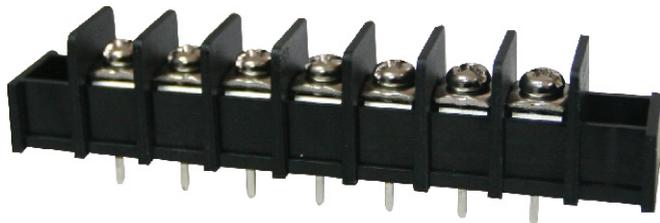

极数	2	3	4	5	6	7	8	9	10
L (mm)	46.10	57.10	68.10	79.10	90.10	101.10	112.10	123.10	134.10
S (mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00
极数	11	12	13	14					
L (mm)	145.10	156.10	167.10	178.10					
S (mm)	110.00	121.00	132.00	143.00					

认证  
电气性能  
参考标准  
额定电压  
额定电流  
使用线径  
耐电压

VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm <sup>2</sup>
AC2000V/Min	



机械性能  
温度范围  
剥线长度  
扭矩  
尺寸  
间距  
极数

-40℃~+105℃
6-7mm
4.0kgf.cm

材质及电镀  
塑件  
方块  
夹子  
螺丝

Pa66 UL94V-0
黄铜 镀镍
磷铜 镀镍
M3 铁 镀镍

订购方式:

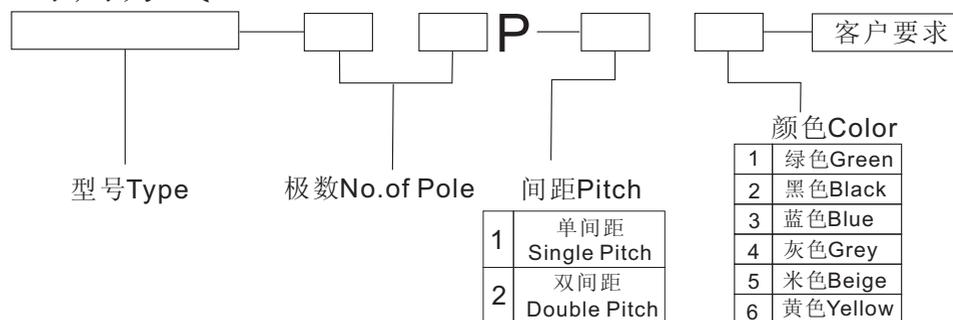

**宁波新三和连接电气有限公司**  
 Ning Bo New Sanhe Electrical Connection Co.,Ltd  
 NAME      SH901AM-11.0