




# 宁波新三和连接电气有限公司

## Ning Bo New Sanhe Electrical Connection Co.,Ltd

### 产品规格书

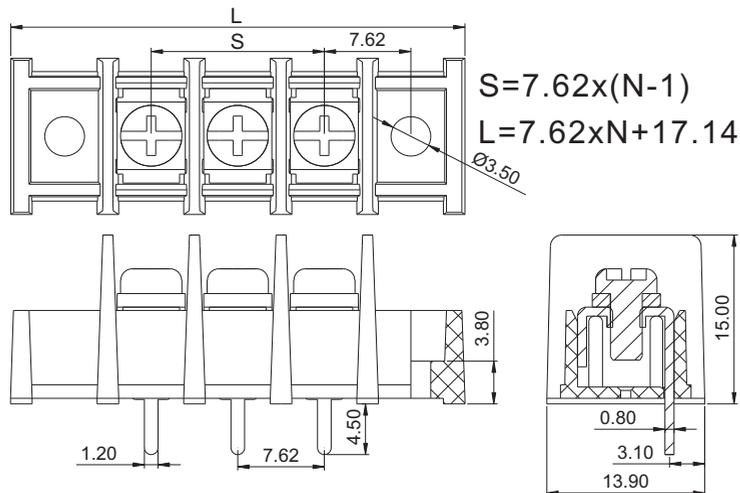

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	32.38	40.00	47.62	55.24	62.86	70.48	78.10	85.72	93.34	100.96	108.58	116.20
S (mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.24	60.96	68.58	76.20	83.82	91.44
极数	14	15	16	17	18	19	20	21	22			
L (mm)	123.82	131.44	139.06	146.68	154.30	161.92	169.54	177.18	184.78			
S (mm)	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02			

认证  
电气性能  
参考标准  
额定电压  
额定电流  
使用线径  
耐电压

VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm <sup>2</sup>
AC2000V/Min	


机械性能  
温度范围  
剥线长度  
扭矩  
尺寸  
间距  
极数

-40℃~+105℃
6-7mm
4.0kgf.cm

材质及电镀  
塑件  
方块  
夹子  
螺丝

Pa66 UL94V-0
黄铜 镀镍
磷铜 镀镍
M3 铁 镀镍

订购方式:

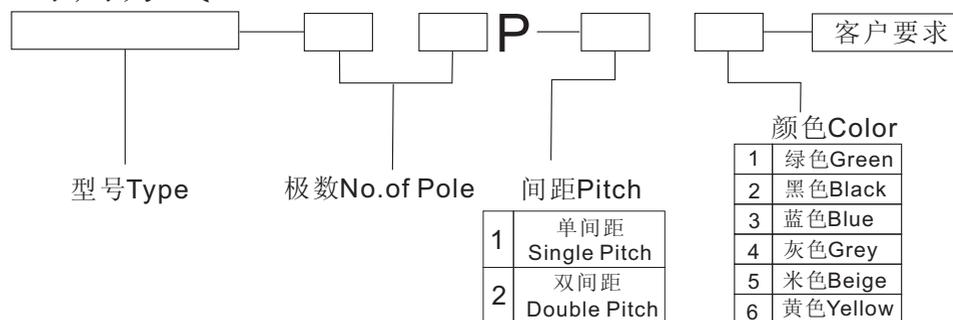

MM ← (INCH) →	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
THIRD ANGLE PROJECTION	NAME SH901AM-7.62