




宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

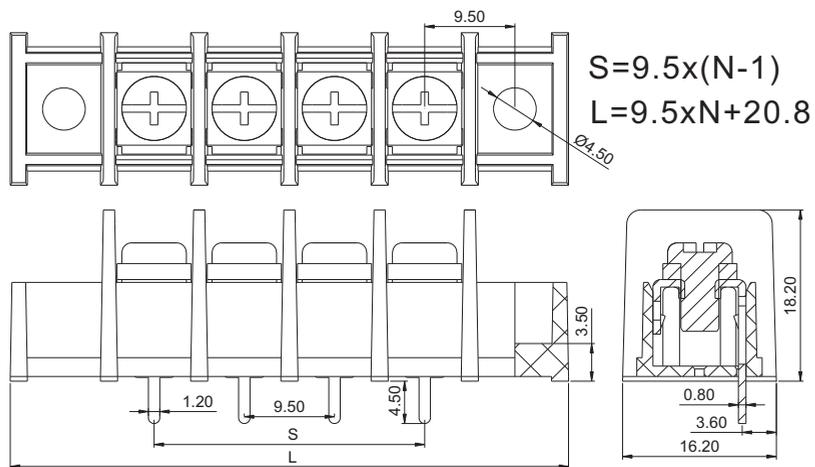

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	39.80	49.30	58.80	68.30	77.80	87.30	96.80	106.30	115.80	125.30	134.80	144.30
S (mm)	9.50	19.00	28.50	38.00	47.50	57.00	66.50	76.00	85.50	95.00	104.50	114.00
极数	14	15	16	17	18	19	20	21	22			
L (mm)	153.80	163.30	172.80	182.30	191.80	201.30	210.80	220.30	229.80			
S (mm)	123.50	133.00	142.50	152.00	161.50	171.00	180.50	190.00	199.50			

认证
 电气性能
 参考标准
 额定电压
 额定电流
 使用线径
 耐电压

VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm ²
AC2000V/Min	


机械性能
 温度范围
 剥线长度
 扭矩
 尺寸
 间距
 极数

-40℃~+105℃
6-7mm
4.0kgf.cm

材质及电镀
 塑件
 方块
 夹子
 螺丝

Pa66 UL94V-0
黄铜 镀镍
磷铜 镀镍
M3 铁 镀镍

订购方式:

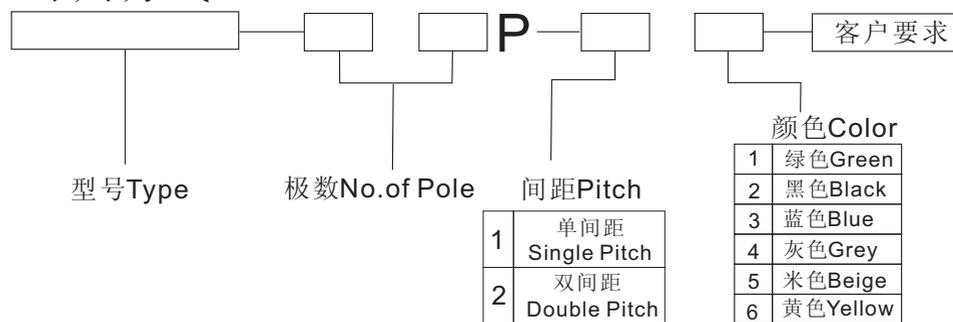

	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
	NAME SH901AM-9.5