



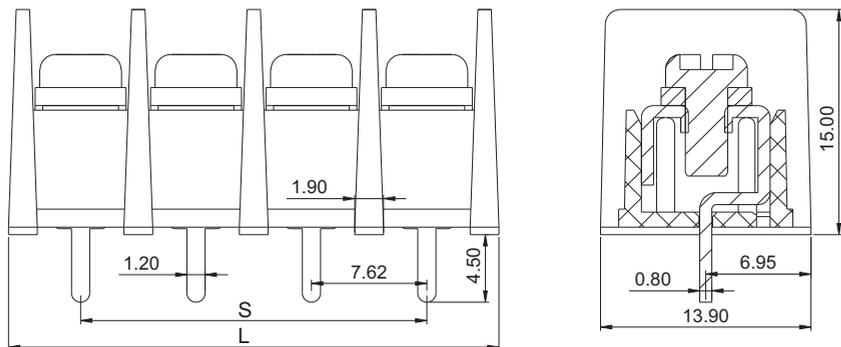

宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

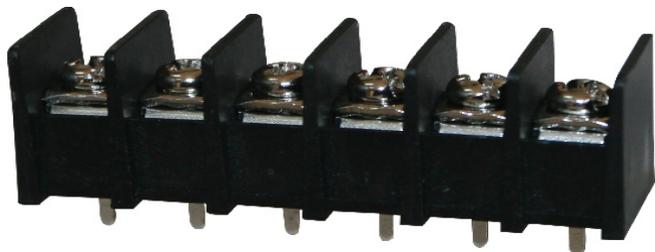

$$S = 7.62 \times (N - 1)$$

$$L = 7.62 \times N + 1.9$$

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	17.14	24.76	32.38	40.00	47.62	55.24	62.86	70.48	78.10	85.72	93.34	100.96
S (mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.24	60.96	68.58	76.20	83.82	91.44
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	108.58	116.20	123.82	131.44	139.06	146.68	154.30	161.92	169.54	177.18	184.78	
S (mm)	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	


认证
电气性能
参考标准
额定电压
额定电流
使用线径
耐电压

机械性能
温度范围
剥线长度
扭距
尺寸
间距
极数

材质及电镀
塑件
方块
夹子
螺丝

VDE	IEC
250V	300V
8A	10A
24-14AWG	2.5mm ²
AC2000V/Min	
-40℃~+105℃	
6-7mm	
4.0kgf.cm	
Pa66 UL94V-0	
黄铜 镀镍	
磷铜 镀镍	
M3 铁 镀镍	

订购方式:

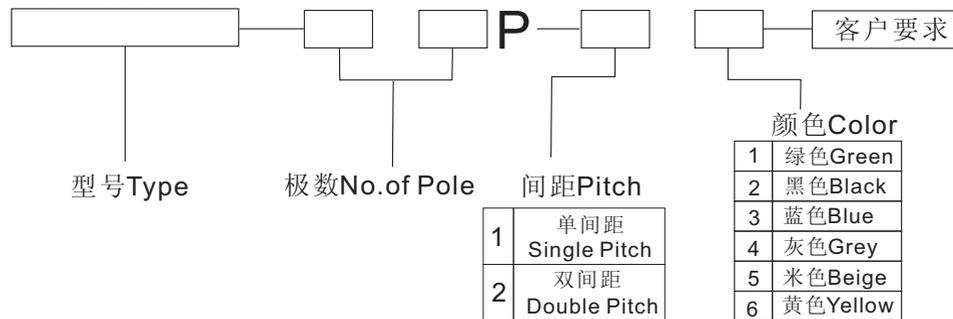

	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
	NAME SH901B-7.62