

A

A




宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET


B

B

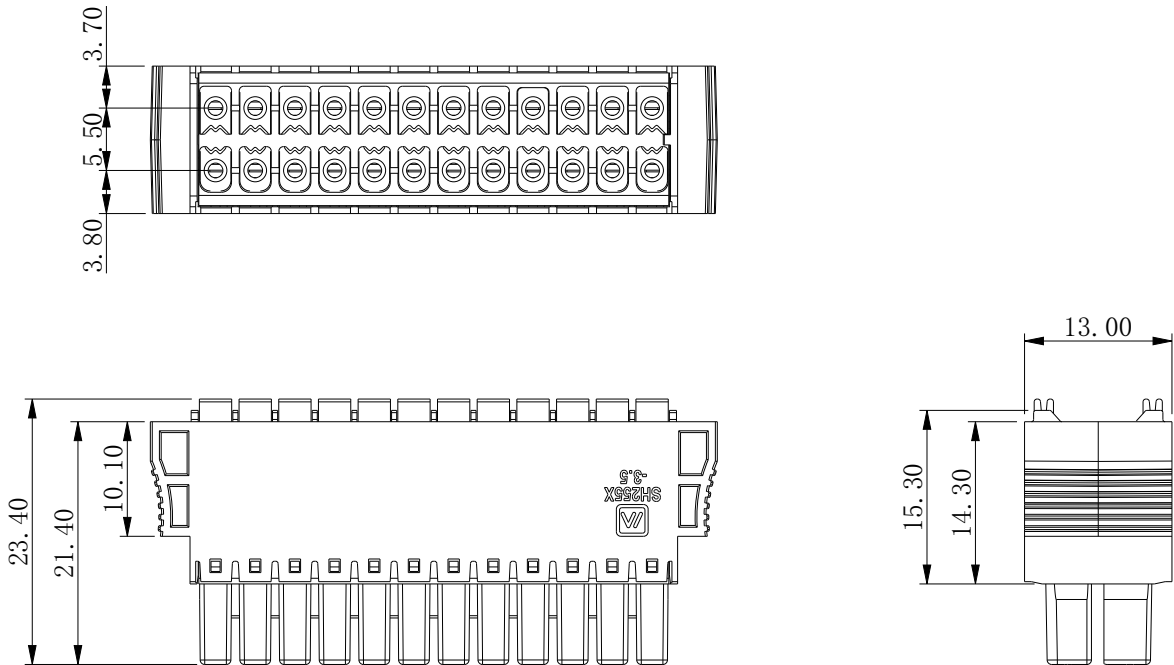

C

C

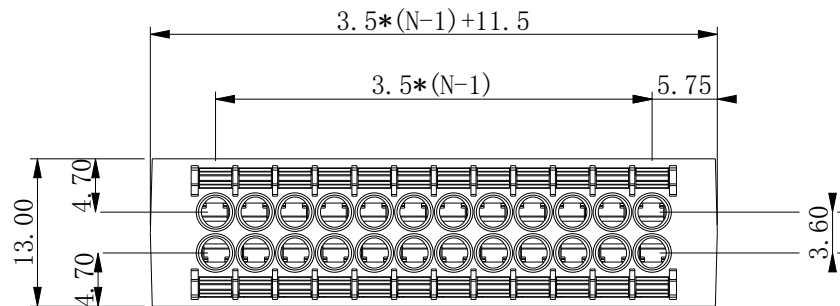

D

D

The spec sheet	linear dimension							≡	—	▱	//	⊥
variable range	to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.6	±0.75	±0.9	0.5	0.025	0.06	0.12	0.4

UL 标准 / UL Standard:	B	C	D
额定电压 / Rted Voltage	160V	/	/
额定电流 / Rated Current	8A	/	/
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/3	III/2	II/2
额定电压 / Rted Voltage	/	160V	/
额定电流 / Rated Current	/	8A	/
线径范围 / Wire Range	24-16AWG / 0.2-1.5mm ²		
额定脉冲电压 / Rate Impulse Voltage	2.5KV		
使用温度范围 / Operating Temperature	-40 °C ~ +105 °C		
剥线长度 / Stripping Length	10mm		
间距 / Spacing	3.5mm		
线数范围 / Line Number Range	2-24P		

4	SH255夹子弹片	SH255-350-WJ	组合	
3	SH255盖板	SH255-350-GB	PA66	
2	SH255按钮	SH255-350-AN	POM	
1	SH255X主体	SH255X-350-ZT	PA66	
ITEM	Part Name	Part Number	Material	Notes

产品名称
Product Name

宁波三和

图纸比例
Drawing Scale

3:2

视图
Project View

A4

视图
Project View

中国宁波慈溪

宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

TEL: +86(574)63226910
FAX: +86(574)63226900

1