

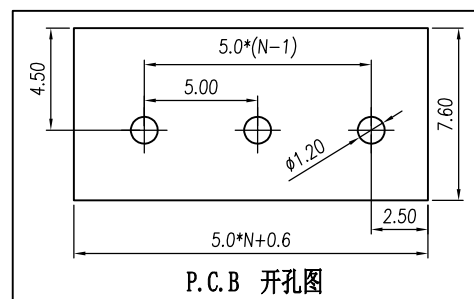
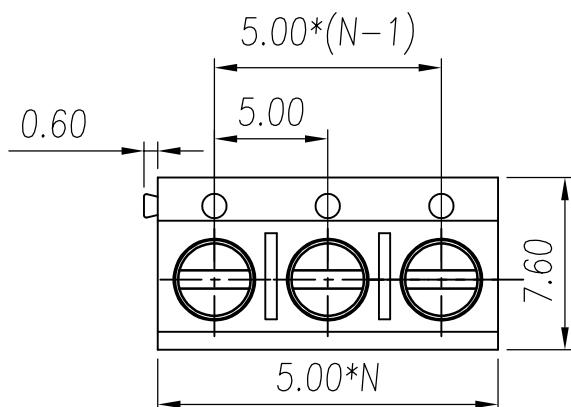


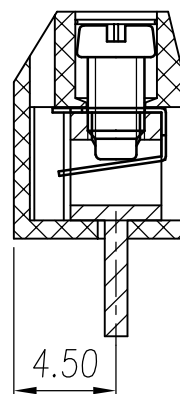

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

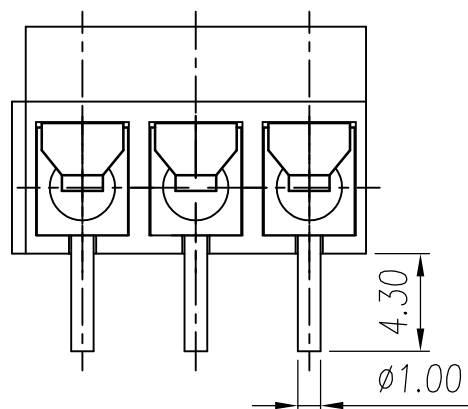

P.C.B 开孔图

Standard UL

Rated voltage 300V
Rated current 10A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Wrth standing voltage AC 2000V/1 Min
Wire range 22~16AWG

Standard IEC

Rated voltage 320V
Rated current 15A
Wire range 1.5mm²

Temp.Range

MAX Soldering

Torque

Steip Length

Pitch

Poles

-40°C~+105°C
+250°C for 5 Sec
0.35Nm
4-5mm
5.0mm
2p,3p

linear dimension

	linear dimension							≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称
Product Name

SH131-5.0

图纸比例
Drawing Scale

3:1

A4

视图
Project View



宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

中国宁波慈溪
TEL: +86(574)63226910
FAX: +86(574)63226900