

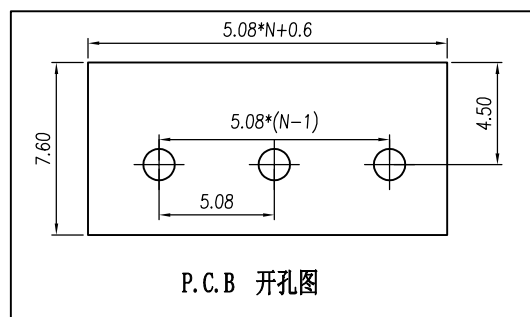
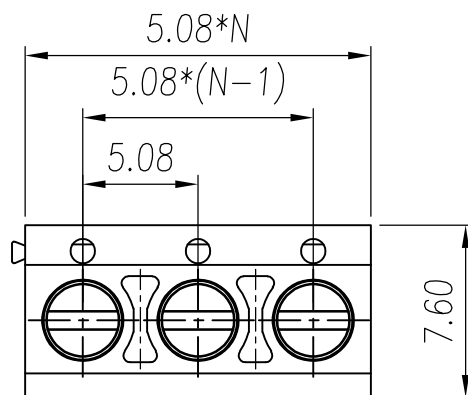


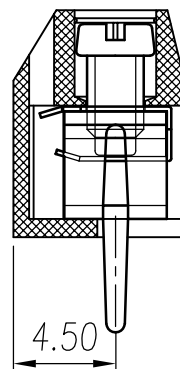

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

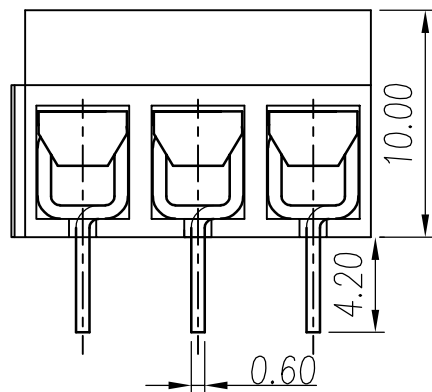

P.C.B 开孔图

Standard UL

Rated voltage 300V
Rated current 10A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Wrth standing voltage AC 2000V/1 Min
Wire range 22~16AWG

Standard IEC

Rated voltage 320V
Rated current 18A
Wire range 1.5mm²

Temp.Range

-40°C~+105°C

MAX Soldering

+250°C for 5 Sec

Torque

0.3Nm

Steip Length

4-5mm

Pitch

5.08mm

Poles

2p,3p

linear dimension					≡	—	□	//	⊥
over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
±0.35	±0.45	±0.60	±0.75	±0.90			0.5	0.025	0.06

产品名称 Product Name	SH131A-5.08		
图纸比例 Drawing Scale	5:1	A4	视图 Project View
中国宁波慈溪			1
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900