

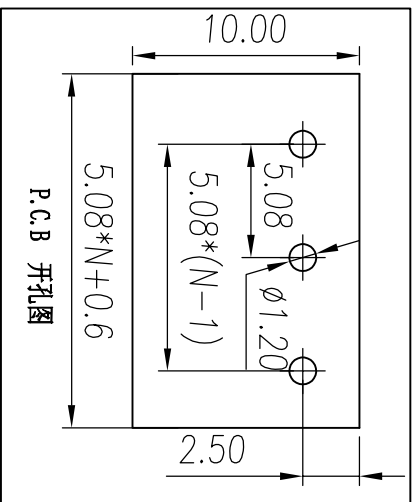
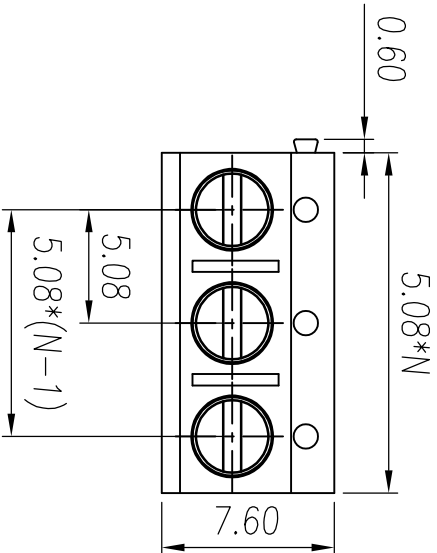


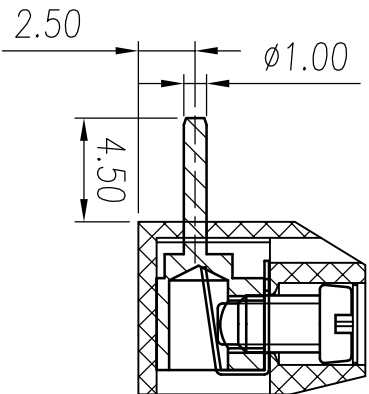

宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

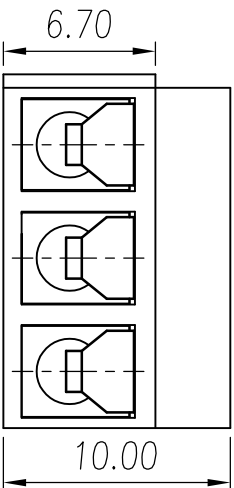

Standard UL

Rated voltage	300V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wrth standing voltage	AC 2000V/1 Min
Wire range	22~16AWG

Standard IEC

Rated voltage	250V
Rated current	20A
Wire range	1.5mm ²

Temp.Range

MAX Soldering	+250°C for 5 Sec
---------------	------------------

Torque

Steip Length	0.35Nm
--------------	--------

Pitch	4.5mm
-------	-------

Poles	5.08mm
-------	--------

Poles	2p,3p
-------	-------

linear dimension										≡	—	□	//	⊥
variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all to 5	over 5 to 30	over 30 to 120				
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4		

产品名称 Product Name	SH131R-5.08			
图纸比例 Drawing Scale	3:1	A4	视图 Project View	中国宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.
图纸比例 Drawing Scale	3:1	A4	视图 Project View	中国宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.



中国宁波新三和连接电气有限公司
NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

TEL:8657163226990
FAX:8657163226990