

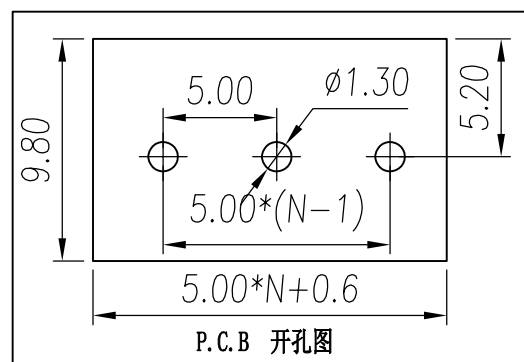
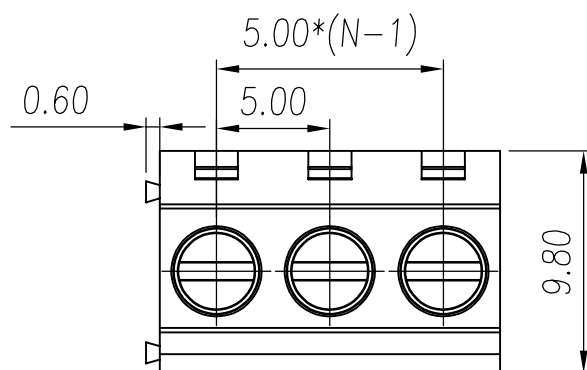


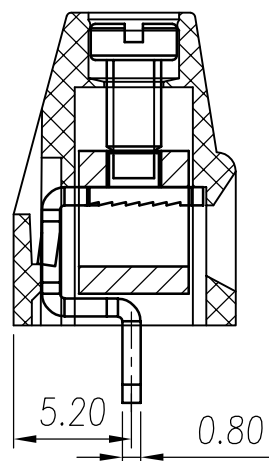

宁波新三和连接电气有限公司

NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.

产品规格书
THE SPEC SHEET

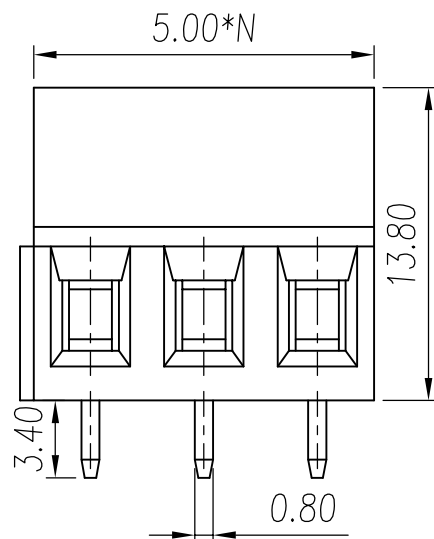

Standard	UL
Rated voltage	300V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Wrth standing voltage	AC 2000V/1 Min
Wire range	26~12AWG
Standard	IEC
Rated voltage	320V
Rated current	20A
Wire range	2.5mm ²
Temp.Range	-40°C~+105°C
MAX Soldering	+250°C for 5 Sec
Torque	0.5Nm
Steip Length	7-8mm
Pitch	5.0mm
Poles	2p,3p

linear dimension

variable range	to 10	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	all	to 5	over 5 to 30	over 30 to 120	over 120 to
tolerance	±0.15	±0.25	±0.35	±0.45	±0.60	±0.75	±0.90	0.5	0.025	0.06	0.12	0.4

产品名称 Product Name	SH136-5.0		
图纸比例 Drawing Scale	3:1	A4	视图 Project View
中国宁波慈溪			中国宁波慈溪
宁波新三和连接电气有限公司 NINGBO NEW SANHE ELECTRIC CONTACT CO., LTD.			中国宁波慈溪 TEL: +86(574)63226910 FAX: +86(574)63226900