



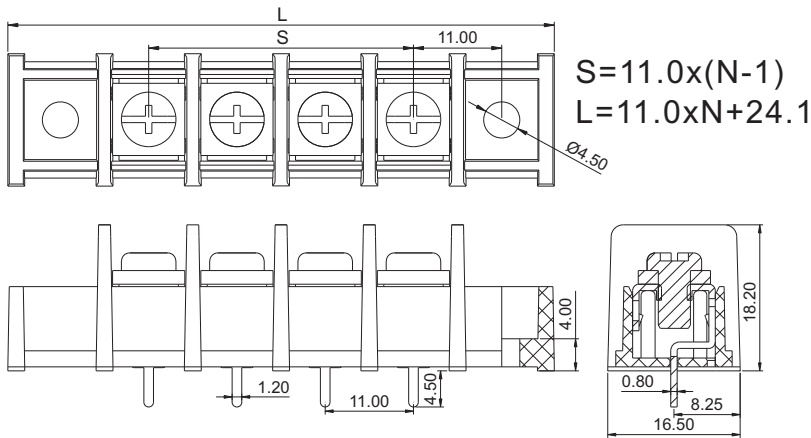

宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

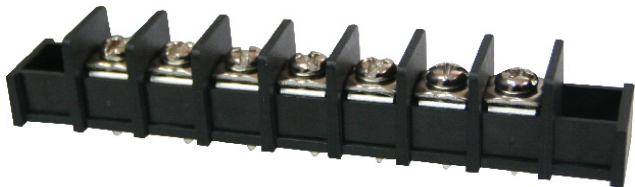

极数	2	3	4	5	6	7	8	9	10
L (mm)	46.10	57.10	68.10	79.10	90.10	101.10	112.10	123.10	134.10
S (mm)	11.00	22.00	33.00	44.00	55.00	66.00	77.00	88.00	99.00
极数	11	12	13	14					
L (mm)	145.10	156.10	167.10	178.10					
S (mm)	110.00	121.00	132.00	143.00					

认证 电气性能

参考标准

额定电压

额定电流

使用线径

耐电压

VDE

250V

8A

24-14AWG

IEC

300V

10A

2.5mm²

AC2000V/Min

机械性能

温度范围

剥线长度

扭距

尺寸

间距

极数

-40℃~+105℃

6-7mm

4.0kgf.cm

材质及电镀

塑件

方块

夹子

螺丝


Pa66 UL94V-0

黄铜 镀镍

磷铜 镀镍

M3 铁 镀镍

订购方式:

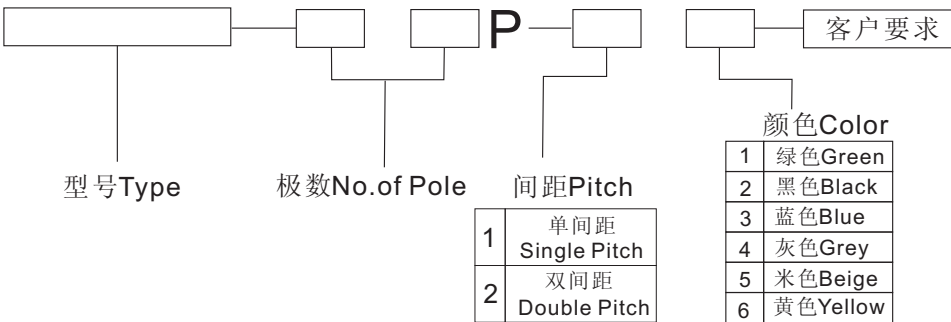

MM (INCH)	宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd
THIRD ANGLE PROJECTION	NAME SH901BM-11.0