




宁波新三和连接电气有限公司


Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

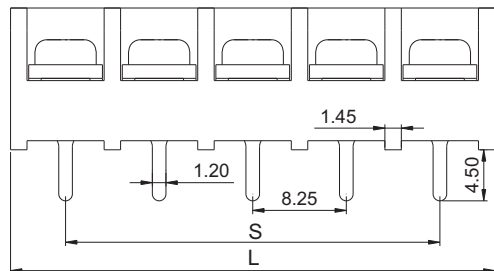

$$S=8.25 \times (N-1)$$

$$L=8.25 \times N + 1.45$$



极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	17.95	26.20	34.45	42.70	50.95	59.20	67.45	75.70	83.95	92.20	100.45	108.70
S (mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	116.95	125.20	133.45	141.70	149.95	158.20	166.45	174.70	182.95	191.20	199.45	
S (mm)	107.25	115.50	123.75	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	

认证 电气性能

参考标准

额定电压

额定电流

使用线径

耐电压

VDE

250V

8A

24-14AWG

IEC

300V

10A

2.5mm²

AC2000V/Min

机械性能

温度范围

剥线长度

扭矩

尺寸

间距

极数

-40℃~+105℃

6-7mm

4.0kgf.cm

材质及电镀

塑件

方块

夹子

螺丝


Pa66 UL94V-0

黄铜 镀镍

磷铜 镀镍

M3 铁 镀镍

订购方式:

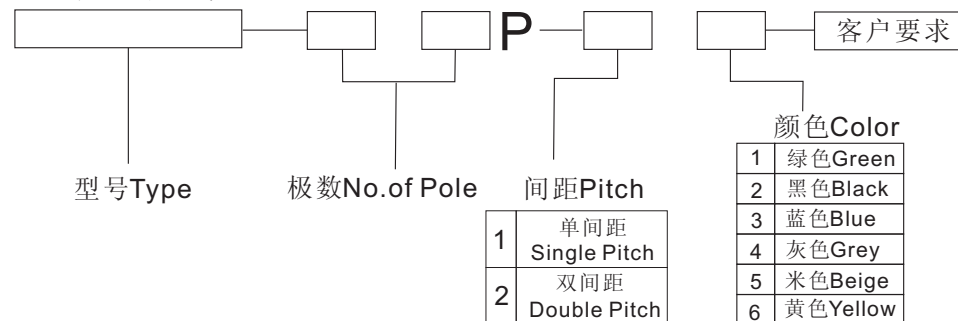

 THIRD ANGLE PROJECTION	MM ← (INCH) →		宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd	
	NAME		SH902A-8.25	