



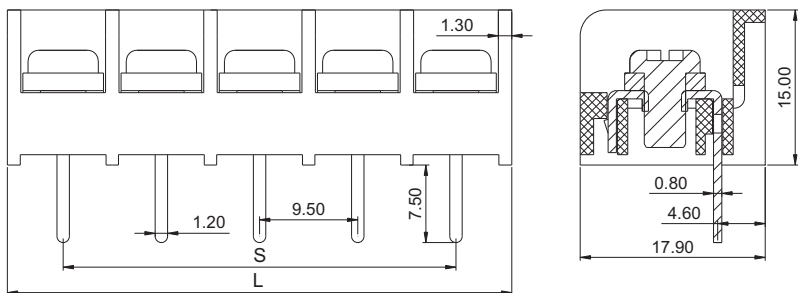

# 宁波新三和连接电气有限公司

## Ning Bo New Sanhe Electrical Connection Co.,Ltd

## 产品规格书

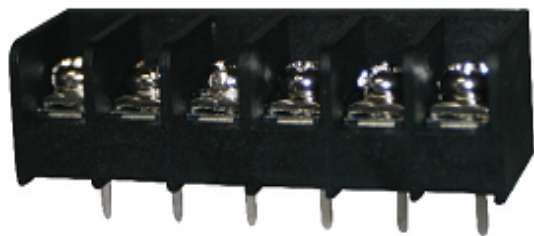

$$S=9.5 \times (N-1)$$

$$L=9.5 \times N + 1.3$$

| 极数     | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     | 12     | 13     |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| L (mm) | 20.30  | 29.80  | 39.30  | 48.80  | 58.30  | 67.80  | 77.30  | 75.70  | 96.30  | 105.80 | 115.30 | 124.80 |
| S (mm) | 9.50   | 19.00  | 28.50  | 38.00  | 47.50  | 57.00  | 66.50  | 66.00  | 85.50  | 95.00  | 104.50 | 114.00 |
| 极数     | 14     | 15     | 16     | 17     | 18     | 19     | 20     | 21     | 22     | 23     | 24     |        |
| L (mm) | 134.30 | 143.80 | 153.30 | 162.80 | 172.30 | 181.80 | 191.30 | 200.80 | 210.30 | 219.80 | 229.30 |        |
| S (mm) | 123.50 | 133.00 | 142.50 | 152.00 | 161.50 | 171.00 | 180.50 | 190.00 | 199.50 | 209.00 | 218.50 |        |

### 认证 电气性能

#### 参考标准

额定电压

额定电流

使用线径

耐电压

VDE

250V

8A

24-14AWG

IEC

300V

10A

2.5mm<sup>2</sup>

AC2000V/Min

### 机械性能

温度范围

剥线长度

扭矩

尺寸

间距

极数

-40℃~+105℃

6-7mm

4.0kgf.cm

### 材质及电镀

塑件

方块

夹子

螺丝


Pa66 UL94V-0

黄铜 镀镍

磷铜 镀镍

M3 铁 镀镍

### 订购方式:

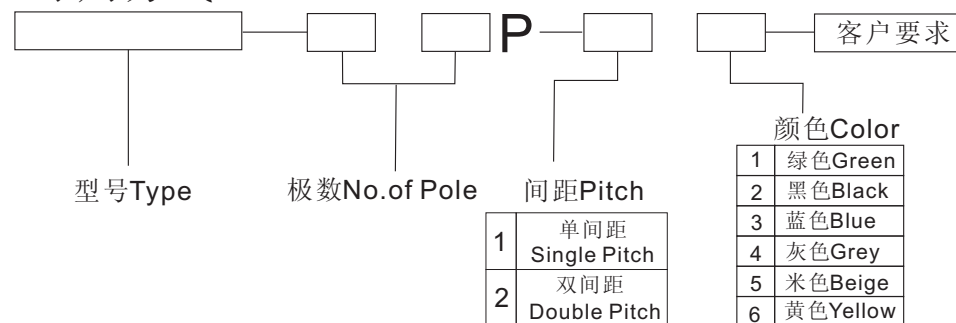

|                                                                               |                                                                                     |  |  |
|-------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|
| <div>MM<br/>(INCH)</div>                                                      | <div>宁波新三和连接电气有限公司</div> <div>Ning Bo New Sanhe Electrical Connection Co.,Ltd</div> |  |  |
| <div><div><div></div><div></div></div><div>THIRD ANGLE PROJECTION</div></div> | <div>NAME</div> <div>SH902A-9.5</div>                                               |  |  |