




宁波新三和连接电气有限公司

Ning Bo New Sanhe Electrical Connection Co.,Ltd

产品规格书

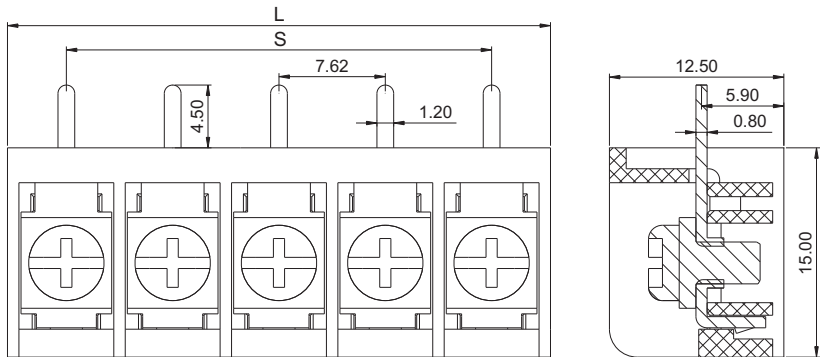

$S=7.62 \times (N-1)$ $L=7.62 \times N+0.82$

极数	2	3	4	5	6	7	8	9	10	11	12	13
L (mm)	16.06	23.68	31.30	38.92	46.54	54.16	61.78	69.10	77.02	84.64	92.26	99.88
S (mm)	7.62	15.24	22.86	30.48	38.10	45.72	53.24	60.96	68.58	76.20	83.82	91.44
极数	14	15	16	17	18	19	20	21	22	23	24	
L (mm)	107.50	115.12	122.74	130.36	137.98	145.60	153.22	160.84	168.46	176.08	183.70	
S (mm)	99.06	106.68	114.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26	

认证 电气性能

参考标准

额定电压

额定电流

使用线径

耐电压

VDE

250V

8A

24-14AWG

IEC

300V

10A

2.5mm²

AC2000V/Min

机械性能

温度范围

剥线长度

扭矩

尺寸

间距

极数

-40℃~+105℃

6-7mm

4.0kgf.cm

材质及电镀

塑件

方块

夹子

螺丝


Pa66 UL94V-0

黄铜 镀镍

磷铜 镀镍

M3 铁 镀镍

订购方式:

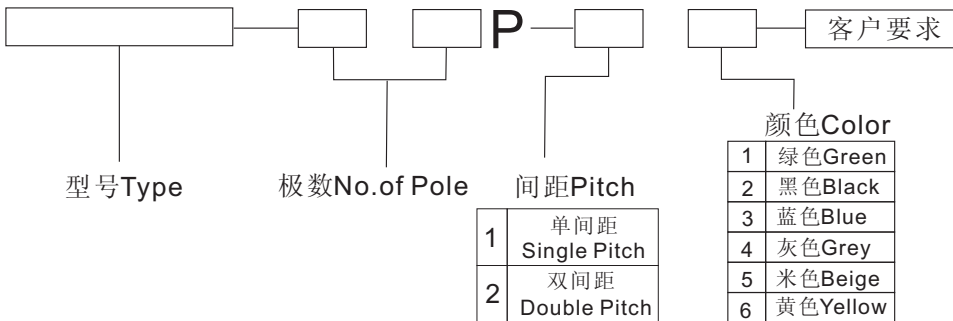

 THIRD ANGLE PROJECTION	MM ← (INCH) →		宁波新三和连接电气有限公司 Ning Bo New Sanhe Electrical Connection Co.,Ltd	
	NAME		SH902R-7.62	